



ROTECH
RURAL

PRODUCT CATALOGUE



AUSTRALIAN FAMILY-OWNED SINCE 1998



4 Rotech Office
Locations



21 Team Members



1000+ Stockists
Nationwide



550+ Stands
In Stores



RURAL GATE HARDWARE.

**BUILDING QUALITY FENCING HARDWARE THROUGH
COLLABORATION AND INNOVATION.**

**IMPROVING
EASE, SPEED,
APPEARANCE, RELIABILITY,
AND LONGEVITY.**

CREATING A BETTER WAY TO FENCE.

RURAL HARDWARE THAT'S EASIER FOR EVERYONE

ROTECH RURAL

RURAL STORES.

**FOCUSED ON
QUALITY, SERVICE,
LOYALTY AND GROWTH.**

COMPLETE RANGE

Centralise the category with one supplier.
High stock levels for reliable supply.

LEADING POINT OF SALE

A smooth, high-quality in-store experience
for store owners and customers.

END USER SUPPORT

Generate quotes and build contractor loyalty.

CONTRACTORS AND FARMERS.

**HELPING YOU
CHOOSE, USE AND SHAPE
FENCING HARDWARE.**

INFORMATION TO EDUCATE, ASSIST, AND CONVERT.

Clear pathways on
where/how to buy and who can install.
- Stockist details, contractor map,
instant quote generator.

Hub of product information.

Instant customer support.

CONTRACTOR DATABASE

Giving professional fencing contractors visibility,
helping farmers find installers to rely on.



WE VALUE EVERY CONVERSATION

PRODUCT INFORMATION?

QUOTE SUPPORT?

FEEDBACK?


PRODUCT DEVELOPMENT?

SEE OUR PRODUCTS DEMONSTRATED AT EVENTS.
TALK TO THE PEOPLE DEVELOPING THE PRODUCTS.
LEARN FROM OTHER CONTRACTORS, FARMERS.



“Been a fencing contractor for 40+ years, Rotech Rural have always been a good quality product, and the company listens to its end users.”

PAUL HALLORAN | ARMIDALE NSW

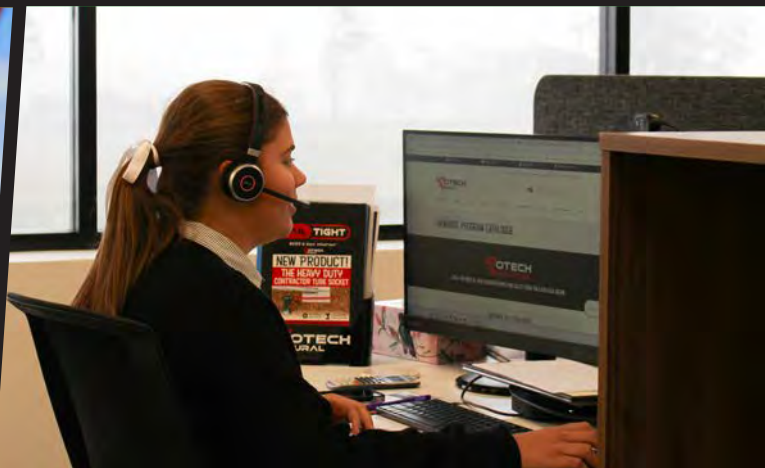

THE ROTECH GUARANTEE

WE'RE COMMITTED TO CUSTOMER SATISFACTION.

IF A PRODUCT DOES NOT MEET EXPECTATIONS FOR **PERFORMANCE, QUALITY OR SUITABILITY** WE'LL WORK WITH YOU TO MAKE IT RIGHT.

OUR PURPOSE

BUILDING FENCES TOGETHER

By working alongside 1000s of contractors, farmers and rural stores, we gain a unique understanding of their needs and challenges and together, we are building the world's best rural fences.

CREATING BETTER FARMS

Rotech helps create farms that are highly productive with exceptional fencing solutions that are built to last, extremely strong, fast and easy to install, and look simply fantastic.

IMPROVING THE LIVES OF RURAL AUSTRALIANS

Rotech takes the worry out of farm fencing for rural Australians and their families. We give them more time, more choices, more profitability and more peace of mind so they can focus on what's really important in their lives.







8 STAYTIGHT END ASSEMBLIES & POSTS

44 RAILTIGHT POST & RAIL FENCING

58 HINGES

78 LATCHES

92 FENCE FITTINGS & ACCESSORIES

104 STOCKYARD FITTINGS & ACCESSORIES

120 POST CAPS

126 CHAIN & ACCESSORIES

132 TOOLS & EQUIPMENT

CONTENTS



10	SELECTION GUIDE
12	ABOUT STAYTIGHT
18	DRIVE-TIGHT® (HAND-DRIVEABLE)
24	MACHINE-DRIVEABLE
26	CONCRETE-IN
27	STRAINER POSTS
28	STEEL MULTI-STAY®
29	PINE MULTI-STAY®
30	TIMBER MULTI-STAY®
31	CONCRETE MULTI-STAY®
32	FITTING KITS
36	INSTALL GUIDE
38	POST & STAY CONNECTORS
40	MUD PLATE
42	RESOURCES

CONTENTS

WHEN SELECTING THE RIGHT **STAYTIGHT** END ASSEMBLY, **CONSIDER**



DRIVE-TIGHT

HAND-DRIVEABLE

BEST FOR MOST APPLICATIONS



TIME

Install with hand driver in under 5 minutes



MATERIALS, EQUIPMENT, SPECIALISED SKILLS

A Drive-Tight Hand driver to install and 2x star pickets.



SITE ACCESS

Best choice for remote or difficult to access areas.




END ASSEMBLY COST

Lowest labour requirement, lowest equipment cost and highest material cost.



MACHINE-DRIVEABLE



TIME

Install with a pneumatic driver in approximately 10mins.



MATERIALS, EQUIPMENT, SPECIALISED SKILLS

A pneumatic post driver suitable for driving 80NB or 100NB Post 1200mm into the ground.



SITE ACCESS

Best suited to accessible site with machinery access.




END ASSEMBLY COST

High equipment purchase/hire cost and mid-range material cost.



CONCRETE-IN



TIME

Requires concrete curing before straining
Minimum 2 site visits and 24hrs required.



MATERIALS, EQUIPMENT, SPECIALISED SKILLS

Digging Tools / Machinery, Concrete Mixer and Concrete.



SITE ACCESS

Requires full site access for digging and concreting equipment.



END ASSEMBLY COST

Highest labour and installation time. Lowest upfront material cost.

SOLUTION FOR EVERY ENVIRONMENT

ROCKY OR INACCESSIBLE AREA? NO MACHINERY ACCESS?

Drive-Tight® (Hand-Driveable) **PG. 20**



PEST CONTROL / EXCLUSION?

Exclusion **PG. 25**



SOFT OR FLOOD-PRONE SOIL?

LokDown lugs **PG. 14**

Mud plate **PG. 40**



ACCESS TO MACHINERY? ACCESSIBLE AREA?

Machine-Driveable **PG. 24**

Concrete-In **PG. 26**



EXISTING POST OR CORNER? EXISTING POST AND STAY?

Multi-Stay® kit **PG. 28**

Steel post fitting kit **PG. 34**



NO WELDING

ADJUSTABLE STRAINER ASSEMBLY SYSTEM

CABLE LOOP

Just slip the cable over the post - No drilling required.

Makes an easy install and more post life!

Suitable for rocky and uneven ground.

It does not have to remain parallel like a rigid rod but can ride over a rocky surface.



TWIST TIGHT® POST & STAY CONNECTOR


ADAPT-A FIT Patented Technology.

Tongue conforms to fit your extra light, light or medium wall stay.

The “twist” ensures a stronger and more secure hold against the inside of the stay.

Available for both steel and timber posts.

Fitted anywhere on the post and at any angle.

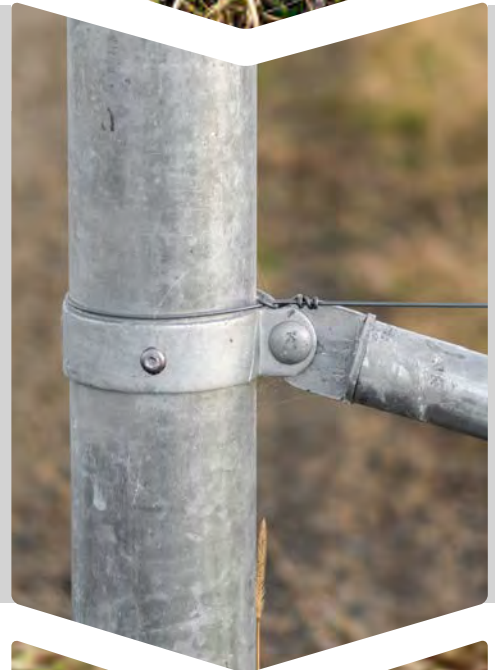

FLOATING FOOTPLATE & STAINLESS STEEL EYEBOLT

The cable remains tensioned with the plate floating on the ground. The eye-bolt and cable work to distribute up to 2/3 of the force back to the strainer post.

The eye-bolt allows for easy adjustment and re-tensioning at any time.




- 19mm Nut  - Standard 1/2" Impact Driver

THE FLOATING FOOTPLATE


Rotech Rural's floating footplate and tension cable design is what makes STAYTIGHT Australia's strongest End Assembly.

The floating footplate and tension cable work to transfer the weight of the fence to the strainer post (see *diagrams*), reducing the chance of the post lifting or the footplate sinking.


TRADITIONAL CONCRETE BASE ❌

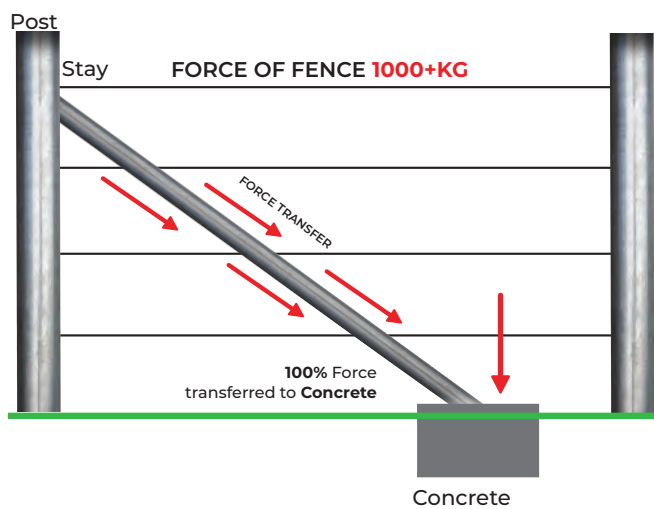

TRADITIONAL WELDED ASSEMBLY ❌

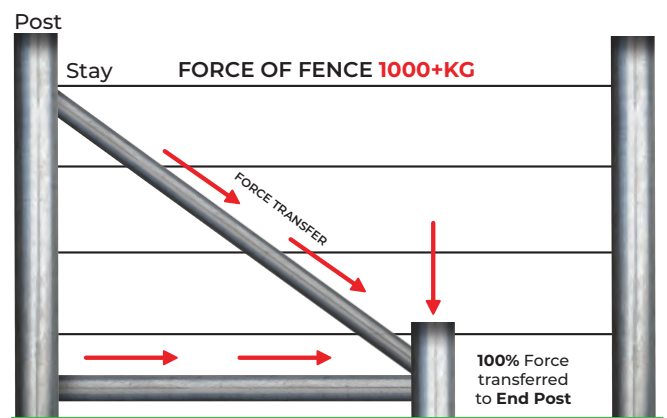

STAYTIGHT FLOATING FOOTPLATE SYSTEM ✔️

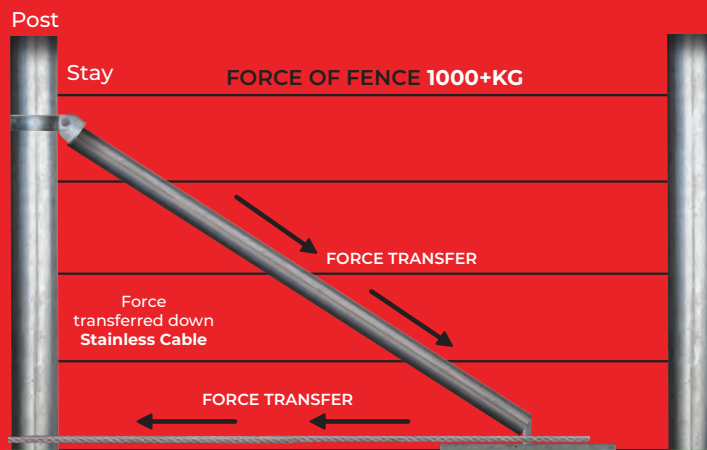

2/3 FORCE TRANSFERRED BACK TO THE STRAINER POST.

The footplate remains tensioned on the ground, transferring the fence load back to the strainer post.

Unlike fixed-base assemblies, it can be adjusted and re-tensioned at any time. As soil conditions change, fixed bases can sink and lose holding power.

The STAYTIGHT® system can be re-tensioned to maintain performance in changing ground conditions.

LOKDOWN

LUGS



PATENT
PROTECTED



3-POINT GROUND ANCHORAGE

LokDown Lugs dramatically increase the surface area resisting upward movement and post pull-out.

UPWARD PULL TEST

WITH LUGS = 1750KG



UPWARD PULL TEST

WITHOUT LUGS = 750KG



Patent protected

LOKDOWN LUG ANCHORAGE KIT



9 348326 005967

PGFL

BUY BREAKS - 1+ box | 6+ boxes

Includes:

- 2 x LokDown Lugs
- 7 x Tek Screws

INCLUDED IN ALL PREMIUM STEEL POST KITS:

- 2 x LokDown Lugs - 7 x Tek Screws
- *per assembly kit (5 kits per tub)




2160KG+ PULL TESTED

8X MORE GROUND
ANCHORAGE



$$V = 0.43M^3$$



$$V = 3.4M^3$$



Eliminates
post pull-out



Highly
flood resistant



More stable in soft
and reactive soils



“THE LUGS MADE THAT POST AS TIGHT AS ANY POST THAT YOU PUT IN THE DRY, AND IT’S WET, I MEAN SERIOUSLY WET!” RESECK LANDS GROUP | QLD

SPEED AND EASE

READY TO STRAIN IN UNDER 15 MINUTES



TENSION 5X FASTER WITH OUR TUBE SPANNER

The tube spanner designed specifically for STAYTIGHT tension assemblies.

Now Available **HEAVY-DUTY** and **standard** - Pg. 35

- 19mm Nut  - Standard 1/2" Impact Driver

- Tightens tension assembly in seconds



**NEW PREMIUM, HIGH USAGE SOCKET
DESIGNED FOR CONTRACTORS**

100% STEEL

WITHSTAND FIRE, FLOOD AND HARSH CONDITIONS.

STAYTIGHT



STAINLESS STEEL
SUPERIOR QUALITY

“They look great and they’re bomb proof too! If we have another fire we are prepared. We won’t need to start from scratch again!”

MICHEAL LANCYBA | STANTHORPE



“An end assembly I installed 4 -5 years ago, has been sitting under water and hasn’t budged at all!”

ERON THOMPSON | EDEN VALLEY

ABOUT STAYTIGHT

DRIVE-TIGHT®

THE ONLY 100NB HAND-DRIVEABLE END ASSEMBLY IN AUSTRALIA!

SLOT-IN ANCHOR LUGS

2 Lugs clip in at 45° angles, and
allow pickets to be driven in.

**8X GROUND
ANCHORAGE.**



$V = 0.43M^3$



$V = 3.4M^3$



Ground
level once
driven-in

.....

HAND-HELD POST DRIVER

21KG - 810MM

AVAILABLE AS


- 80NB OR 100NB round.
- 2100mm or 2400mm length.

Use either the hand-held driver
OR a machine driver.

THE PENETRATOR

Pointed end penetrates the
ground with ease.

The 3 fins track straighter. You are
not restricted by 90° as with an
angle post.

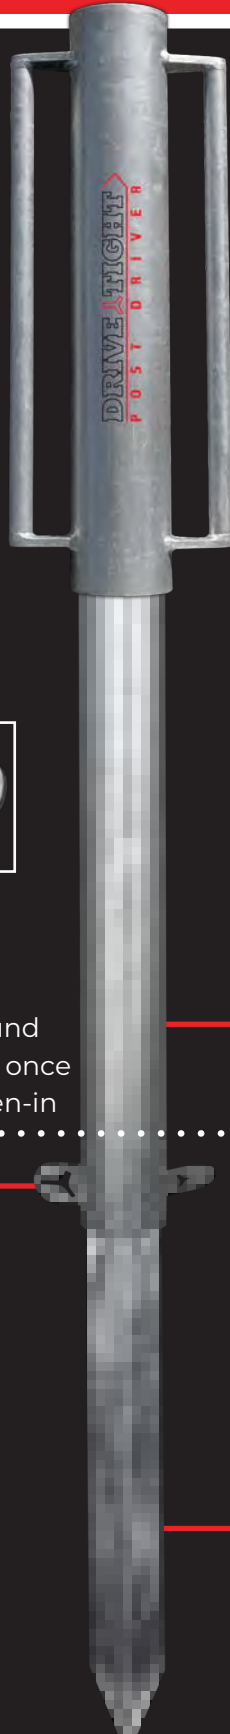



DIFFICULT OR INACCESSIBLE AREAS?

- Install with just a hand held driver.



ROCKY GROUND?

- Picket end will slide down between rocks.



DEEP BLACK SOILS? FLOOD PRONE AREAS?

- Anchor lugs provide 3 points of anchorage, giving the post a larger surface area.




SCAN
TO
WATCH



DRIVE-TIGHT®



**HAND
DRIVEABLE**



**STAINLESS STEEL
EYEBOLT + LUGS**

DRIVE-TIGHT® (HAND-DRIVEABLE) END ASSEMBLY KIT - STAINLESS STEEL



RSATDTSS | POST Ø - 100NB | STAYØ - 40NB

BUY BREAKS - 10+ | 60+



RSATHDDTSS | POST Ø - 100NB | STAYØ - 50NB

BUY BREAKS - 10+ | 60+



STANDARD KIT - Hot-Dipped GALVANISED EYEBOLT



RSATHDDT | POST Ø - 100NB | STAYØ - 50NB




Extra stays for corners? MULTI-STAY® KITS (pg. 28)



2 LUG-SLOT POSITIONS

INSTALL YOUR LUGS FOR A POST HEIGHT OF 1200mm OR 1500mm



**STAINLESS STEEL
EYEBOLT + LUGS**



**80NB POSTS SUIT
STANDARD PETROL DRIVERS**

DRIVE-TIGHT® (HAND-DRIVEABLE) EXCLUSION END ASSEMBLY KIT - STAINLESS STEEL



9 348326 006858

RSATHDDT802400SS | POST Ø - 80NB

BUY BREAKS - 10+ | 60+

POST LENGTH - 2400mm | STAYØ - 50NB | STAY LENGTH - 3250mm

INCLUDES - Post, Post Cap, Stay, Post & Stay Connector,
Tension Cable (**Stainless Steel Eyebolt**) & Footplate.


FENCE HEIGHT - 1200mm - 1500mm



9 348326 005929

RSATHDDT2400SS | POST Ø - 100NB

BUY BREAKS - 10+ | 60+




STANDARD KIT - Hot-Dipped GALVANISED EYEBOLT



9 348326 005516

RSATHDDT2400 | POST Ø - 100NB | STAYØ - 50NB

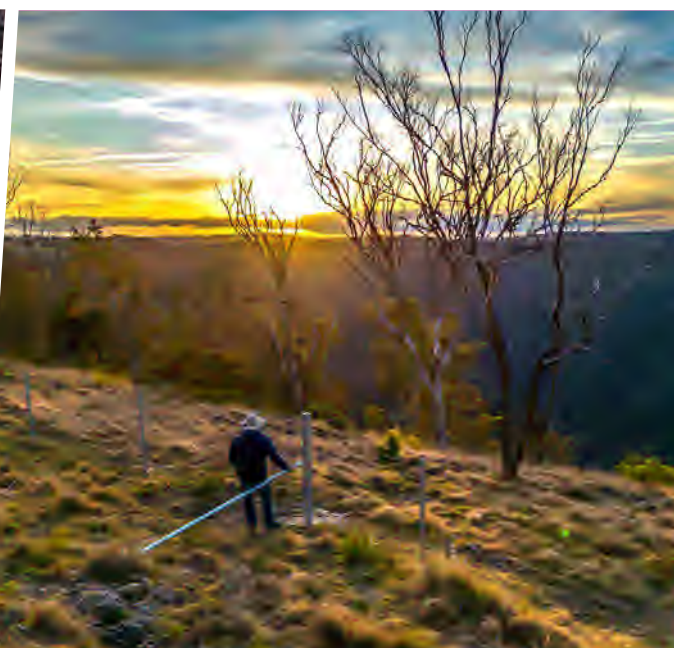

PERFECT FOR REMOTE & ROCKY COUNTRY!

STAYTIGHT

THE ONLY HAND-DRIVEABLE 100NB STRAINER POST IN AUSTRALIA



DRIVE-TIGHT® (HAND-DRIVEABLE) STEEL STRAINER POST



9 348326 006841

RSPDT802400 | POSTØ - 80NB

BUY BREAKS - 10+ | 60+

POST LENGTH - 2400mm

FENCE HEIGHT - 1500mm - 1200mm



9 348326 004717

RSPDT100 | POSTØ - 100NB

BUY BREAKS - 10+ | 60+

POST LENGTH - 2100mm

FENCE HEIGHT - 1200mm



9 348326 005523

RSPDT1002400 | POSTØ - 100NB

BUY BREAKS - 10+ | 60+

POST LENGTH - 2400mm

FENCE HEIGHT - 1500mm - 1200mm

DRIVE-TIGHT® POST DRIVER



DRIVE-TIGHT® POST DRIVER



9 348326 004793

DTPD

BUY BREAKS - 1+ | 5+ | 10+

SUIT POSTØ - ≤100NB | LENGTH - 810mm

WEIGHT - 21kg

STAYTIGHT

INSTALL POSTS ANYWHERE

ENQUIRE WITH YOUR LOCAL STORE ABOUT HIRE AVAILABILITY.



SCAN
TO
WATCH

STAYTIGHT




“Never going to dig a hole again. Rotech Drive-Tight end assemblies were up in no time. Gate post never moved an inch after fence wires were strained up, love the posts!”

SANDRA BEARD | INGLEWOOD, QLD

DRIVE-TIGHT® (HAND-DRIVEABLE)



STAINLESS STEEL
EYEBOLT + LUGS



MACHINE
DRIVEABLE

MACHINE-DRIVEABLE ROUND POST END ASSEMBLY KIT - STAINLESS STEEL



9 348326 003598

RSAT4.5SS | STAYØ - 40NB

BUY BREAKS - 10+ | 60+

POST Ø - 100NB | POST LENGTH - 2100mm | STAY LENGTH - 3250mm

INCLUDES - Post, Post Cap, Stay, Post & Stay Connector, **LokDown Lugs**, Tension Cable (STAINLESS STEEL EYEBOLT) & Footplate.

FENCE HEIGHT - 1200mm



9 348326 003598

RSATHD4.5SS | STAYØ - 50NB

BUY BREAKS - 10+ | 60+



STANDARD KIT - Hot-Dipped GALVANISED EYEBOLT + NO LUGS



9 348326 003598

RSAT4.5 | POST Ø - 100NB | STAYØ - 40NB



9 348326 003611


RSATHD4.5 | POST Ø - 100NB | STAYØ - 50NB



Extra stays for corners? **MULTI-STAY® KITS** (pg. 28)



STAINLESS STEEL
EYEBOLT + LUGS



MACHINE
DRIVEABLE

MACHINE-DRIVEABLE ROUND POST EXCLUSION END ASSEMBLY KIT - STAINLESS STEEL



RSATHD4.53.25MSS

BUY BREAKS - 10+ | 60+

POST Ø - 100NB | POST LENGTH - 3250mm | STAYØ - 50NB | STAY LENGTH - 3250mm

INCLUDES - Post, Post Cap, Stay, Post & Stay Connector, **LokDown Lugs**, Tension Cable (STAINLESS STEEL EYEBOLT) & Footplate.

FENCE HEIGHT - 2000mm



STANDARD KIT - Hot-Dipped GALVANISED EYEBOLT + NO LUGS



RSATHD4.53.25M | POST Ø - 100NB | STAYØ - 50NB



**NEED A HIGHER FENCE TO KEEP OUT
DOGS, KANGAROOS, PIGS AND GOATS?**



MACHINE-DRIVABLE



STAINLESS STEEL
EYEBOLT + LUGS



CONCRETE-IN

CONCRETE-IN (NON-DRIVEABLE) ROUND POST END ASSEMBLY KIT - STAINLESS STEEL



RSAT3.2SS | STAYØ - 40NB

BUY BREAKS - 10+ | 60+

POST Ø - 100NB | POST LENGTH - 2100mm | STAY LENGTH - 3250mm

INCLUDES - Post, Post Cap, Stay, Post & Stay Connector, **LokDown Lugs**,
Tension Cable (STAINLESS STEEL EYEBOLT) & Footplate.

FENCE HEIGHT - 1200mm



RSATHD3.2SS | STAYØ - 50NB

BUY BREAKS - 10+ | 60+




STANDARD KIT - Hot-Dipped GALVANISED EYEBOLT + NO LUGS



RSATHD3.2 | POST Ø - 100NB | STAYØ - 50NB



Extra stays for corners? **MULTI-STAY® KITS** (pg. 28)



**MACHINE
DRIVEABLE**

MACHINE-DRIVEABLE ROUND STRAINER POST



RSP1004.5

BUY BREAKS - 10+ | 60+

POSTØ - 100NB

POST LENGTH - 2400mm

FENCE HEIGHT - 1200mm



RSP1004.53.25M

BUY BREAKS - 10+ | 60+

POSTØ - 100NB

POST LENGTH - 3250mm

FENCE HEIGHT - 2000mm



CONCRETE-IN

CONCRETE-IN (NON-DRIVEABLE) ROUND STRAINER POST



RSP1003.2

BUY BREAKS - 10+ | 60+

POSTØ - 100NB

POST LENGTH - 2166mm

FENCE HEIGHT - 1200mm

MULTI STAY®



EXTRA STAYS FOR CORNERS? OR ALREADY HAVE POSTS?



STAINLESS STEEL
EYEBOLT + LUGS

MULTISTAY® KIT (POST NOT INC) - STAINLESS STEEL



RSK8040SS | POST Ø - 80NB | STAYØ - 40NB
BUY BREAKS - 10+ | 60+ | 125+



RSK8050SS | POST Ø - 80NB | STAYØ - 50NB
BUY BREAKS - 10+ | 60+ | 125+

STAY LENGTH - 3250mm

INCLUDES - Post Cap, Stay, Post & Stay Connector, **LokDown Lugs**,
Tension Cable (STAINLESS STEEL EYEBOLT) & Footplate.

FENCE HEIGHT - 1200mm-2000mm



STANDARD KIT - Hot-Dipped GALVANISED EYEBOLT + NO LUGS



RSK40 | POST Ø - 100NB | STAYØ - 40NB



RSK50 | POST Ø - 100NB | STAYØ - 50NB

**ADD UP TO 4 STAYS
TO A SINGLE POST**



TUBE SPANNER - 5X FASTER

STS | LENGTH - 410mm | NUT - 19mm (M12) | DRIVE - 1/2"

MULTI STAY®



STAINLESS STEEL
EYEBOLT + LUGS



PREFERRED
TO TIMBER KIT

PINE POST (≤250mm) MULTI-STAY® KIT - STAINLESS STEEL



9 348326 005271

PPSK50

BUY BREAKS - 10+ | 60+ | 125+

SUITABLE POST Ø - ≤250mm | STAY Ø - 50NB | LENGTH - 3250mm

INCLUDES - Stay, Stay Connector, Tension Cable (STAINLESS STEEL EYEBOLT) & Footplate.

FENCE HEIGHT - 1200mm-2000mm



TWIST-TIGHT® TIMBER/PINE STAY CONNECTOR

Requires single 16mm hole.



CABLE LOOP = NO DRILLING

Drop the loop over your pine post, or slip-knot if you have the existing wire installed.



SCAN
TO
WATCH



MULTI STAY®



TIMBER POST (>250mm) MULTI-STAY® KIT



9 348326 003543

TSK50

BUY BREAKS - 10+ | 60+ | 125+

SUITABLE POST Ø - >250mm | STAY Ø - 50NB | LENGTH - 3250mm

INCLUDES - Stay, Stay Connector, Tension Cable (DOUBLE-ENDED EYEBOLT) & Footplate.

FENCE HEIGHT - 1200mm-2000mm



TWIST-TIGHT® TIMBER/PINE STAY CONNECTOR

Requires single 16mm hole.

DOUBLE-ENDED EYEBOLT

Allows installation at varying angles without precise parallel drilling.

Ideal for uneven and rocky ground.



SCAN
TO
WATCH

MULTI STAY®



STAINLESS STEEL
EYEBOLT + LUGS

CONCRETE POST MULTI-STAY® KIT - STAINLESS STEEL



9 348326 005271

PPSK50

BUY BREAKS - 10+ | 60+ | 125+

STAY Ø - 50NB | LENGTH - 3250mm

INCLUDES - Stay, Stay Connector, Tension Cable (STAINLESS STEEL EYEBOLT) & Footplate.

FENCE HEIGHT - 1200mm-2000mm



TWIST-TIGHT® TIMBER/PINE
STAY CONNECTOR

Requires single 16mm hole.

CABLE LOOP = NO DRILLING

Drop the loop over your post, or slip-knot
it if you have the existing wire installed.



FITTING KITS

ALL THE COMPONENTS, WITHOUT THE PIPE.



HEAVY DUTY TUB
INCLUDES
5X FITTING KITS



**STAINLESS STEEL CABLE AND
GAL OR STAINLESS STEEL EYE-BOLT**

Loop suits posts <250mm, 8mm 316 grade core



POST CAP
HD - 2mm
galvabond



**LOKDOWN
ANCHOR LUGS**
8x more ground
anchorage



**FLOATING
FOOTPLATE**
8mm thick tongue



**TWIST-TIGHT®
POST & STAY
CONNECTOR**
ADAPT-A FIT
TECHNOLOGY



5 MINUTE INSTALL!



“ It is great to have everything required come in the one kit. This makes the whole installation quick and easy. A terrific product! ”

DON RUSH | QLD



SCAN
TO
WATCH



**STAINLESS STEEL
EYEBOLT + LUGS**

STEEL POST FITTING KIT - STAINLESS STEEL



9 348326 006391

SSFK8040SS

BUY BREAKS - 5+ | 50+ | 125+
POSTØ - 80NB
STAYØ - 40XL - 40M NB



9 348326 006407

SSFK8050SS

BUY BREAKS - 5+ | 50+ | 125+
POSTØ - 80NB
STAYØ - 50XL - 50M NB



9 348326 006308

SSFK10040SS

BUY BREAKS - 5+ | 50+ | 125+
POSTØ - 100NB
STAYØ - 40XL - 40M NB



9 348326 005783

SSFK10050SS

BUY BREAKS - 5+ | 50+ | 125+
POSTØ - 100NB
STAYØ - 50XL - 50M NB



9 348326 006315

SSFK15050SS

BUY BREAKS - 5+ | 50+ | 125+
POSTØ - 150NB
STAYØ - 50XL - 50M NB

INCLUDES - Post Cap, Post & Stay Connector,
LokDown Lugs, Tension Cable (**STAINLESS STEEL EYEBOLT**) & Footplate.

FENCE HEIGHT - 1200mm-2000mm

STANDARD KIT - Hot-Dipped GALVANISED EYEBOLT + NO LUGS



9 348326 003925

SSFK10040

POSTØ - 100NB | STAYØ - 40XL-40M NB



9 348326 003949

SSFK10050

POSTØ - 100NB | STAYØ - 50XL - 50M NB





**STAINLESS STEEL
EYEBOLT + LUGS**



PINE POST FITTING KIT - STAINLESS STEEL



9 348326 004915

SSFKPP50

BUY BREAKS - 5+ | 50+ | 125+

POSTØ - ≤250mm | STAYØ - 50XL - 50M NB

INCLUDES - Stay Connector,
Tension Cable (**STAINLESS STEEL EYEBOLT**)
& Footplate.

FENCE HEIGHT - 1200mm-2000mm

TIMBER POST FITTING KIT



9 348326 005899

SSFKTP50

BUY BREAKS - 5+ | 50+ | 125+

POSTØ - >250mm | STAYØ - 50XL - 50M NB

INCLUDES - Stay Connector, Tension
Cable (**DOUBLE-ENDED EYEBOLT**) & Footplate.

FENCE HEIGHT - 1200mm-2000mm

TENSION CABLE ASSEMBLY - STAINLESS STEEL



9 348326 005776

TCASS

BUY BREAKS - 5+ | 50+ | 125+

INCLUDES - Tension Cable (**STAINLESS STEEL EYEBOLT**) & Footplate.

STANDARD KIT - HOT-DIPPED GALVANISED EYEBOLT



9 348326 003499

TCA

BUY BREAKS - 5+ | 50+ | 125+

INCLUDES - Tension Cable (**HOT-DIPPED GALVANISED EYEBOLT**) & Footplate.



STANDARD TUBE SOCKET



9 348326 003697

STS

BUY BREAKS - 1+ | 5+ | 10+

LENGTH - 410mm

MATERIAL - Standard Steel



HEAVY-DUTY TUBE SOCKET



9 348326 006155

STSHD

BUY BREAKS - 1+ | 5+ | 10+

LENGTH - 480mm

MATERIAL - Chrome Molybdenum Alloy Steel

HOW TO INSTALL THE STAYTIGHT FITTING KITS



*Your post and stay are in position.
Now it's time to install the STAYTIGHT® fitting kit.*

1

INSTALL THE LOKDOWN LUGS.

Install one lug on either side of the post, approximately 50–100mm below ground level.

Start with the centre Tek screw first.
Install half- or full-length picket into lug.

Backfill and compact soil firmly around the lugs.



2

POSITION THE TENSION CABLE

Place the stainless steel cable loop over the post and lay the stay in the direction required.

Installing a corner assembly?
Add additional cable loops now.

3

INSTALL THE TWIST-TIGHT® CONNECTOR

Slide the disk onto the tongue and insert the tongue into the end of the stay.

Tap firmly into position.

The Adapt-a-Fit tongue will adjust to suit different stay sizes.

4

INSTALL THE POST CLAMP

Position the clamp approximately two-thirds up the post.
(Approx. 900mm on a standard 1200mm fence.)

Position the tongue between the clamp tabs.

Insert the bolt and finger tighten.

5

CONNECT THE STAY

Lower the stay onto the footplate tongue.

Ensure the stay is seated firmly before tightening.

6

TENSION THE SYSTEM

Using the STAYTIGHT tube socket and an impact driver, tighten the eyebolt until the assembly is fully tensioned.


Hold the eyebolt to prevent spinning during tightening.

Always use the supplied anti-seize for smooth adjustment and long-term serviceability.

7

INSTALL THE POST CAP

Hammer the supplied post cap firmly onto the post.

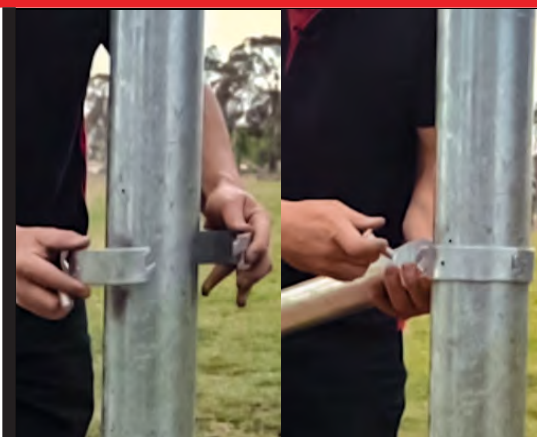

SCAN
TO
WATCH



READY TO STRAIN YOUR FENCE

FAST. STRONG. NO WELDING. NO DRILLING.

TWIST TIGHT®



Patent protected

Hot-Dipped

6mm thick steel tongue.

8.8 grade nut and bolt.

TWIST-TIGHT® POST & STAY CONNECTORS



PSC8040

BUY BREAKS - 20+ | 40+ | 100+
POSTØ - 80NB
STAYØ - 40XL - 40M NB
BOX QTY - 20



PSC10050

BUY BREAKS - 20+ | 40+ | 100+
POSTØ - 100NB
STAYØ - 50XL - 50M NB
BOX QTY - 20



PSC8050

BUY BREAKS - 20+ | 40+ | 100+
POSTØ - 80NB
STAYØ - 50XL - 50M NB
BOX QTY - 20



PSC15050

BUY BREAKS - 20+
POSTØ - 150NB
STAYØ - 50XL - 50M NB
BOX QTY - 10



PSC10040

BUY BREAKS - 20+ | 40+ | 100+
POSTØ - 100NB
STAYØ - 40XL - 40M NB
BOX QTY - 20



**RUN MULTIPLE STAYS AT
ANY ANGLE.**

ADJUST ANYTIME.

Install with the STAYTIGHT Tube
spanner or a shifter.

NO MORE WELDING YOUR POST TO YOUR STAY

QUICK EASY INSTALL - SMOOTH TIDY FINISH



DOVETAIL JOIN

NEW AND IMPROVED DESIGN - 2 INTERLOCKING STEPS.

70% increase in holding capacity.

Easily add to existing fence posts.



THE TONGUE

125mm down into the stay.

Tapered at one end for easy install.

Wide at the top for secure hold against the inside of the pipe.



THE DISK

Increases the load bearing capacity of the connection by 30%.

Provides a tidy finish and seals stay.

ONE SIZE FITS ALL - ADAPT-A FIT SLOT

Connector tongue can conform to any stay wall. Slit will compress to the exact fit.



STAYTIGHT

ADD EXTRA SUPPORT IN VERY SOFT, WET OR UNSTABLE GROUND.



SCAN
TO
WATCH



Patent pending

MUD PLATE ADAPTOR KIT



9 348326 006698

MPA

BUY BREAKS - 1 | 10+ | 20+

SIZE - 400mm x 150mm

INCLUDES - 2 Mud Plate Attachment
Halves, 5 Tek Screws

Extra secure hold

HD series 500 deep-driller tek screws.

Attaches directly to
new OR existing
STAYTIGHT footplates.



USE ONLY WHERE REQUIRED.
Easy transport. Fast installation.



66% INCREASE TO FOOTPLATE SURFACE AREA
NO NEED FOR CONCRETE PADS!



“Concrete footpads are expensive and harder to transport and install. It’s a great low-cost way to modify an existing system.”

SLIMLINE CONTRACTING | VIC

FAQ'S

2) WHAT'S THE BIGGEST FENCING OVERSIGHT?

Focusing on material cost instead of install cost.

Often, the option chosen is the one with the smallest initial outlay (timber assemblies and welded steel assemblies). However labour can be a very significant expense.

3) WHERE ARE END ASSEMBLIES REQUIRED?

The requirement for an end assembly is dictated by a change in the direction of the fence, the topography of the land, or for a gateway. Extra stays are recommended on corners 90 degrees or less and where you have multiple fence lines on the post.

4) CAN THE END ASSEMBLIES BE USED IN STEEP TERRAIN?

Yes, the flexibility and adjustability of the system allows the kit to be used in rough or steep terrain. The cable can be slip-knotted around the post and looped to shorten it further on very steep gradients while maintaining correct tension.

5) WHY DO I NEED ADJUSTMENT?

Temperature changes, wire stretch, livestock pressure and seasonal ground movement all contribute to tension loss over time. With adjustment, you can respond to changes in the fence line tension before it becomes a problem.

STAYTIGHT assemblies give you control of the adjustment via the tension cable and the post and stay connectors. This is not possible with traditional timber assemblies, a steel assembly that's been welded, or any assembly that has its stay buried in the ground.

A fence that can be adjusted is a fence that can be maintained best.

6) HOW DEEP SHOULD I PUT MY STRAINER POST

For driven assemblies, minimum depth of 1200mm.

For concrete-in assemblies, minimum embedment depth of 900mm.

The deeper the post is installed, the greater its load capacity.

In softer soils or high-load situations, additional depth may be required.

7) HOW FAR UP THE POST SHOULD MY STAY CONNECT?



$\frac{3}{4}$ of the way up the post, from ground level. $1.2(m) \times .75 (\frac{3}{4}) = .9m$ (900mm).

The stay plays a critical part in the holding power of the assembly. If the stay is positioned too high or too low, it can increase uplift forces and reduce the effectiveness of the assembly. Rotech's 3.25m stay also reduces uplift pressure on the post by approximately 200kg compared to shorter stay assemblies.

Unlike traditional systems, StayTight allows the stay connection point to be adjusted to any height/position.

PIPE SIZE GUIDE

**[ACTUAL
SIZE]**

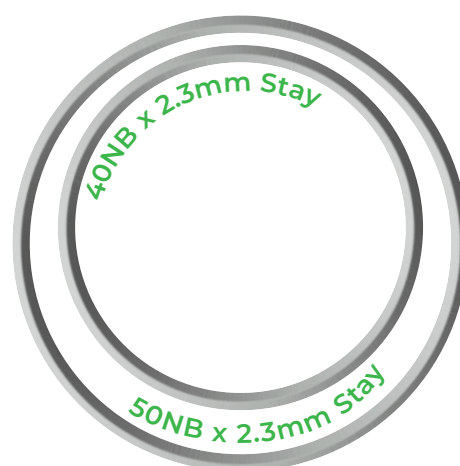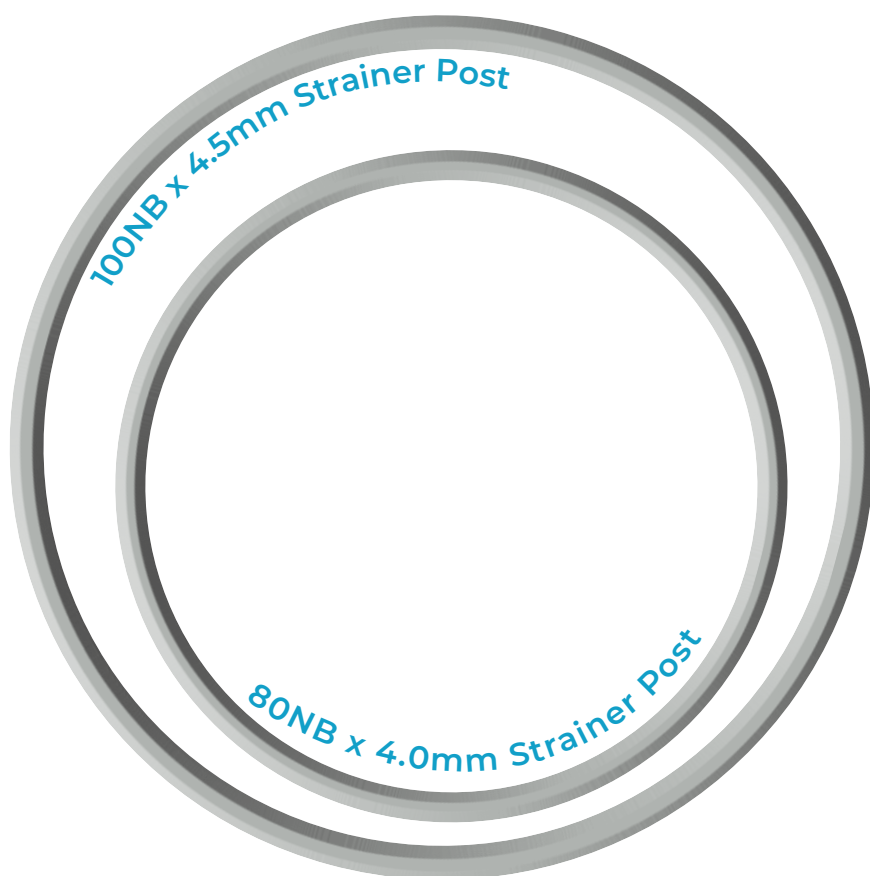

STRAINER POSTS

NOMINAL BORE - 80NB | OUTSIDE Ø (O.D) - 88.9mm

MEDIUM - WALL THICKNESS - 4mm (DRIVEABLE)

NOMINAL BORE - 100NB | OUTSIDE Ø (O.D) - 114.3mm

EXTRA LIGHT - WALL THICKNESS - 3.2mm (NON-DRIVEABLE)

MEDIUM - WALL THICKNESS - 4.5mm (DRIVEABLE)

STAYS

NOMINAL BORE - 40NB | OUTSIDE Ø (O.D) - 48.3mm

EXTRA LIGHT - WALL THICKNESS - 2.3mm

MEDIUM - WALL THICKNESS - 3.2mm

NOMINAL BORE - 50NB | OUTSIDE Ø (O.D) - 60.3mm

EXTRA LIGHT - WALL THICKNESS - 2.3mm





46

ABOUT RAILTIGHT

50

RAILTIGHT END BRACKETS

52

INSTALL GUIDE

54

**CATTLE RAIL JOINER
CATTLE RAIL POST CAP**

55

CATTLE RAIL SADDLE STRAP

RAILTIGHT

WELDED VS **RAIL** **TIGHT**



Repairs require cutting, grinding and rewelding.



Welds must be painted. Paint rarely matches gal finish and will still rust faster.



Requires skilled welders. Harder to position and check alignment before welding off.



Additional consumable costs: gas, rods/wire and paint.



Slopes and difficult-access sites take longer to install.



Fire risk during summer installation



WELDED POST & RAIL ❌

■ ■ ■ ■ ■ TIME

17 – 20 mins per rail

■ ■ ■ ■ ■ EQUIPMENT & SPECIALISED SKILLS

Welder & generator, grinder, paint, clamps, helmet & gloves and fire unit/extinguisher

Skilled welder required

■ ■ ■ ■ ■ SITE ACCESS

Best suited to accessible sites with machinery access

■ ■ ■ ■ ■ COST

Rail only - *Lower cost*

Welder labour - *Higher cost*

Consumables required, welding wire/rods, gas, paint - *Higher cost*

RAILTIGHT - SCREW-ON POST & RAIL ✔️

■ ■ ■ ■ ■ TIME

10 mins per rail

■ ■ ■ ■ ■ EQUIPMENT & SPECIALISED SKILLS

Impact driver, level, tape measure & marker. Grinder (required for angles)

■ ■ ■ ■ ■ SITE ACCESS

Suitable for remote, steep or difficult to access areas

■ ■ ■ ■ ■ COST

Rail and bracket pair - *Higher cost*

Standard labour (non-welder) - *Lower cost*

No consumables required - *No cost*



PROFESSIONAL. SIMPLE. POST & RAIL.



10 MINUTE INSTALL

NO CUTTING, NO GRINDING, NO WELDING, NO CLEANING, NO PAINTING

SAFE FOR HORSES & OTHER LIVESTOCK

Smooth, sleek anti-bruise finish minimises the risk of injury to horses and livestock.



HIGH QUALITY FINISH

Fully enclosed design delivers a clean professional finish with no welding, rust or paint touch-ups.

QUICK, EASY REPAIRS

Replace damaged rails in minutes by simply unscrewing the bracket and fitting a new rail section.

UNIQUE CUT-OUT ALLOWING 40° ADJUSTMENT

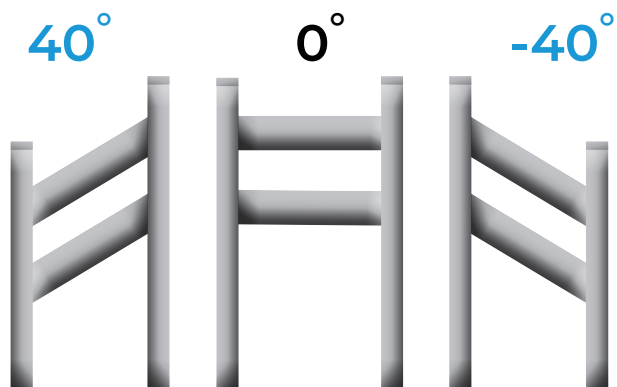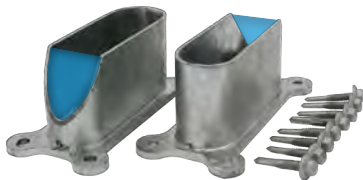

“The cut-out compensates for the elevation change which saves a lot of time - no welding and measuring angles! They come up a treat!”

JEREMY | ARMIDALE RURAL SERVICES

■ POST - 75MM, 90MM, 100MM, 125MM, 150MM | GALVANISED



RAILTIGHT END BRACKET PAIR - FLAT



9 348326 005936

CRE11542

BUY BREAKS - 10+ | 25+ | 100+ | 500+

SIZE - 115 x 42mm | POST - ≥ 75 mm

INCLUDES - 2x End Brackets, 9x Tek Screws

BOX QTY - 5 (Pairs)

SERIES 500 TEK SCREWS

NO PRE-DRILLING

ALL BRACKETS SUITABLE FOR TIMBER

Swap out tek screws for timber screws

“They are great. Certainly saved me a lot of time & the customer a lot of money!”

DAN | WIMMERA RURAL



● POST - 80NB, 90NB, 100NB, 125NB, 150NB | GALVANISED



RAILTIGHT END BRACKET PAIR - ROUND



CRER11542

BUY BREAKS - 10+ | 25+ | 100+ | 500+

SIZE - 115 x 42mm | POST - $\geq 80\text{NB}$

INCLUDES - 2x End Brackets, 9x Tek Screws


BOX QTY - 5 (Pairs)

BRACKET CONFORMS TO RADIUS

NO GRINDING



HOW TO INSTALL THE CATTLE RAIL END BRACKET

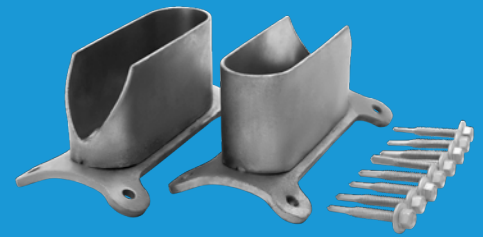

1 INSTALL THE POSTS.

USE EITHER: DRIVE-IN STEEL POSTS OR CONCRETE-IN POSTS

Ensure accurate spacing by laying the rail on the ground between the posts.

- When working with slopes, allow extra rail length for trimming to the angle.

Set a string line for the top of your posts for guidance.

2 MARK RAIL HEIGHTS.

Position the first rail 50mm down from the top of the post and space the remaining rails evenly underneath.

On slopes, run an angled string line from the top to the bottom to ensure the rails are installed in line.

3 INSTALL FIRST END BRACKET.

Fasten the first two tek screws diagonally across corners for stability.

Position the bracket cut-out:

UPWARDS FOR DOWNWARD slope.

DOWNWARDS FOR UPWARD slope.

Swap out tek screws when using timber posts.

4 POSITION THE RAIL.

Slide the rail onto the first bracket, then slide in the second bracket.



5

SECURE SECOND BRACKET.

Slide the second bracket into place and fasten using the supplied screws.

On flat ground, check the rail with a level.

Repeat steps 3-5 for each rail.

ADD EXTRA STRENGTH.

Install an additional screw through the side of the rail into the bracket.

INSTALLATION TIP.

If there is too large a gap between the post and bracket after installation, use a ratchet strap to pull the post into position.

Use a ratchet strap to pull the post into position.

Once the gap is closed, install the additional screw to secure the connection.



SCAN
TO
WATCH



PROFESSIONAL RESULTS

FAST INSTALLATION. LONG-LASTING FINISH.



RAILTIGHT

■ RAIL - 115 X 42MM | GALVANISED



HD Series 500 Tek screws

Patent Pending

RAILTIGHT CATTLE RAIL JOINER



CRJ11542

BUY BREAKS - 10+ | 25+ | 100+

LENGTH - 200mm

INCLUDES - 1x Joiner, 5x Tek Screws

BOX QTY - 5



CATTLE RAIL POST CAP



CRC11542

BUY BREAKS - 1+ | 40+ | 200+

SIZE - 115 X 42mm

BOX QTY - 40



200mm OVERLAP

Superior strength



ANTI-BRUISE DESIGN

A smooth, seamless finish



LOAD TESTED SUPPORTS
300KG+ LESS THAN 10mm OF SAG.

■ RAIL - 115 X 42MM | GALVANISED



RAILTIGHT CATTLE RAIL SADDLE STRAP



CRS11542

BUY BREAKS - 10+ | 25+ | 100+

SIZE 230mm x 40mm

INCLUDES - 1x Strap, 5x Tek Screws

BOX QTY - 50



CONTINUOUS RAIL RUNS


Join rails cleanly to create longer, uninterrupted fence lines.

SMOOTH, ANTI-BRUISE FINISH

Designed for horse paddocks and premium rail systems.

FAST, NO-WELD INSTALL

No welding or grinding required.
Securely attach with HD series 500 deep-driller tek screws.

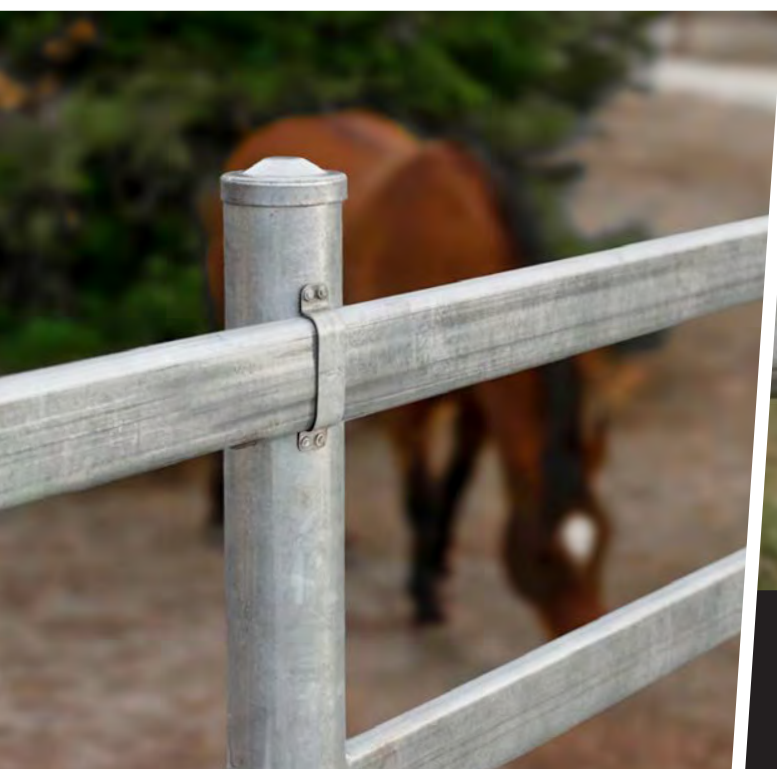

SECURE OUTSIDE JOIN

ALLOWS FOR HEAT EXPANSION.



“Used on both timber and steel they saved us weeks of work! All the rails sit within 1mm of each other. They made the project more accurate and faster. Extremely impressed!”

MG STEEL | TAS



“A powder-coated RailTight fence looks incredible!”

KATE RAMM | NSW



- 
- 
- 62** SCREW-ON TIMBER POST HINGE SETS
 - 64** FASTAFIT™ BOLT-THRU TIMBER POST HINGE SET
 - 66** BOLT-THRU TIMBER POST HINGE SETS
 - 68** BOLT-THRU LOW-LOC TIMBER POST HINGE SET
 - 70** GATE STRAP & GUDGEON TIMBER POST HINGE SET
 - 72** BOLT-ON ADJUSTABLE ROUND STEEL POST HINGE SET
 - 74** WELD-ON/SCREW-ON TOP SADDLE BACKING PLATE
 - 75** WELD-ON U-TYPE HINGE SET
 - 76** WELD-ON HINGE SET
 - 77** CONCRETE POST HINGE SET




HINGES



HINGE SETS & LATCHES SOLD INDIVIDUALLY.

**BUILD YOUR PERFECT
GATE PACK IN-STORE!**

PICK ANY HINGE PICK ANY LATCH

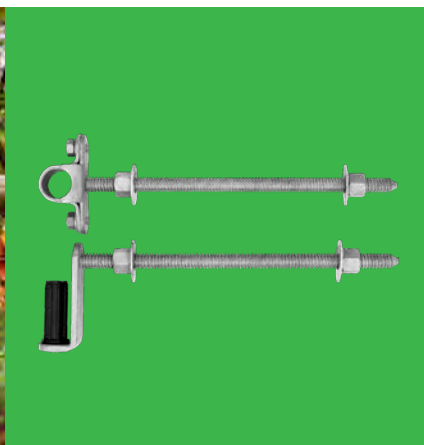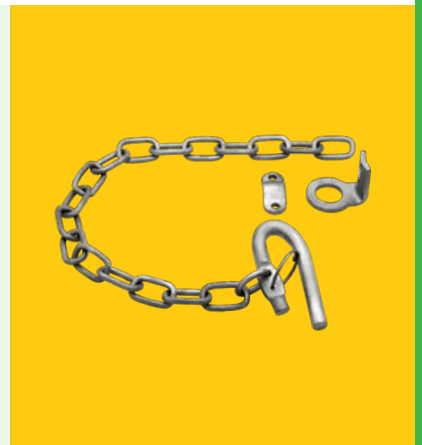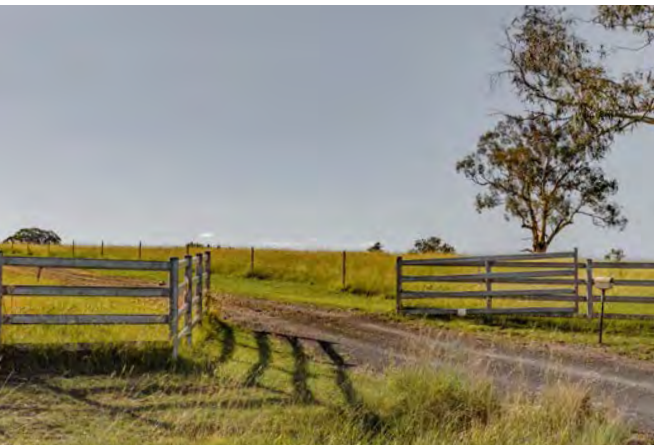

EVERY GATE IS DIFFERENT.

JUST PAY FOR WHAT YOU NEED!


GUDGEON SCREWS FITTED BEHIND THE GATE MORE DIFFICULT TO REMOVE WHEN GATE ON

■ **TIMBER POST** | **GALVANISED**

! Use 10mm Auger
See pg. 135



20% STRONGER
M12 75MM
COACH SCREWS

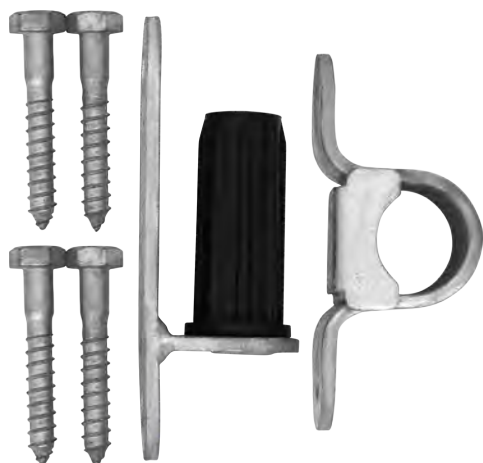

SCREW-ON TIMBER POST HINGE SET




9 348326 005035

FG1

BUY BREAKS - 10+ | 25+ | 50+ | 100+

GATE - 25NB | POST - Any size

BOX QTY - 5

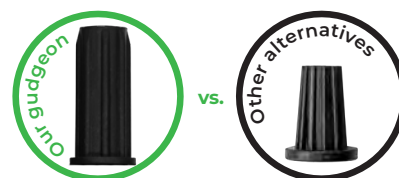

Non-tapered. Extra Secure.

Longest gudgeon 72mm.

SUITS GATES UP TO 12FT!



“ We love your Gudgeons on our new front gate hinges at Willow Tree. The ease of opening every day is a pleasure! ”


JAMES HUNTER

TIMBER POST | GALVANISED

! Use 10mm Auger
See pg. 135



20% STRONGER
M12 75MM
COACH SCREWS



SUITS GATES
UP TO 12FT

SCREW-ON TIMBER POST HINGE SET



9 348326 005226

FG4

BUY - 10+ | 25+ | 50+ | 100+

GATE - 25NB | POST - Any size

BOX QTY - 5



9 348326 005646



FG4R*

BUY - 10+ | 25+ | 50+ | 100+

GATE - 25NB | POST - Any size

BOX QTY - 5

*Radius Saddle

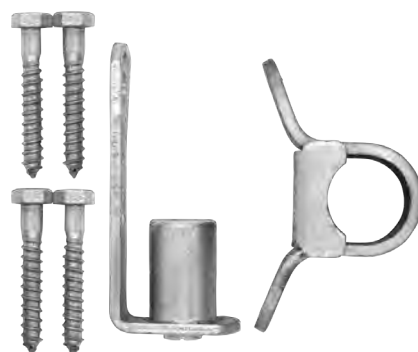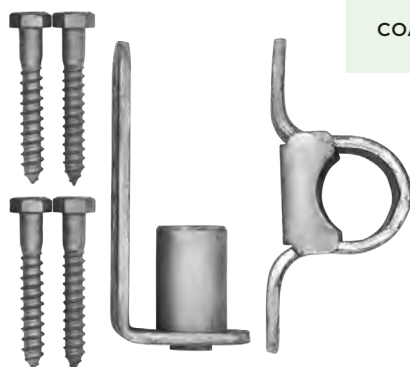

NEW AND IMPROVED!

SLEEK FIT

Radius saddle providing a
smooth and sleek fit for
round posts.

COACH SCREWS

M12 75mm coach screws.
20% stronger.

FITTED BEHIND GATE

Screws are behind the gate
making it more difficult for gate to
be removed once sitting on.



MOST PREMIUM, USER FRIENDLY GATE HINGE



SCAN
TO
WATCH

■ **TIMBER POST** | **GALVANISED**

! Use 22mm Auger
See pg. 135

FASTAFIT

BOLT-THRU TIMBER POST HINGE SET



FG2

BUY - 10+ | 25+ | 50+ | 100+

GATE - 25NB

POST - <400mm

BOX QTY - 5




vs.



Non-tapered. Extra Secure.

Longest gudgeon 72mm.

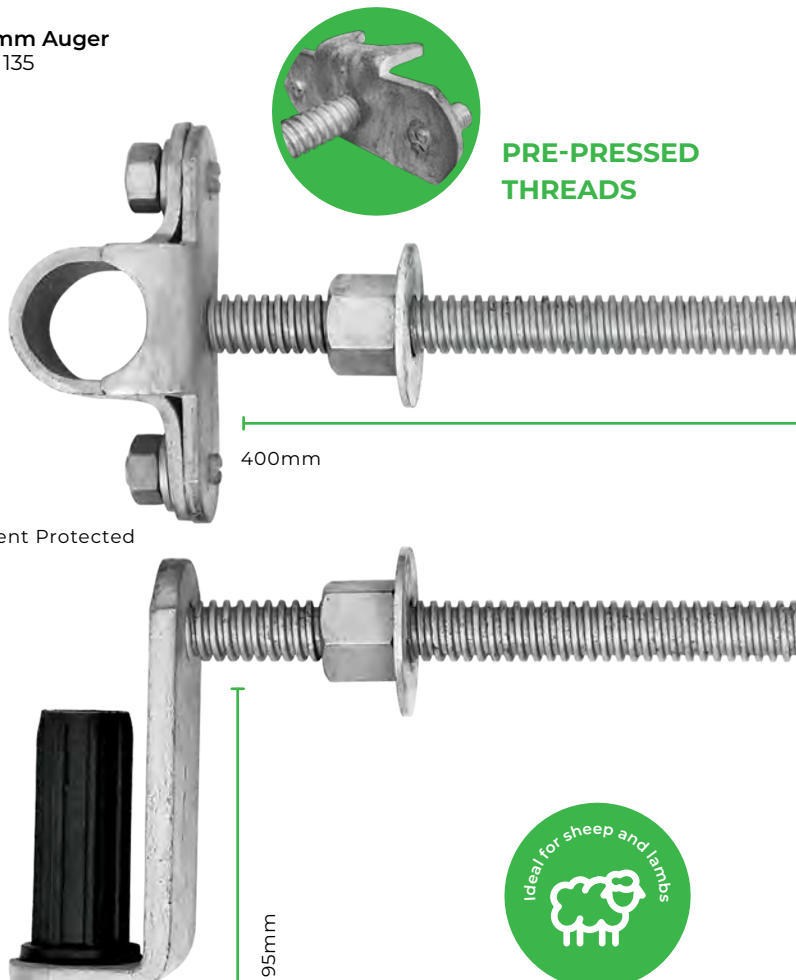

DESIGNED TO SWING LOW

WITHOUT HAVING TO DRILL THE POST HOLE LOW.



REQUIRES ONLY TWO HOLES

- 1** Install the bolt-through gudgeon plate and backing plate. Requires a single hole in the centre of the post.
- 2** Simply lift the gate onto the gudgeon, place the saddle over and tighten the nuts.




Once the gate is on, the hinge can't twist, eliminating the need for the anti-twist bars.

ADJUSTABLE IN & OUT

300mm BOLT LENGTH GIVES EXTRA LENGTH TO ADJUST YOUR GATE FOR THE PERFECT SWING ANGLE.

EXTRA LARGE 50mm Ø WASHERS

ensure the hinge won't pull through the post and prevent sagging.

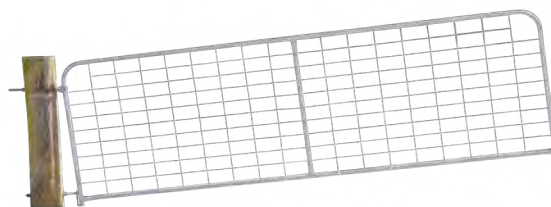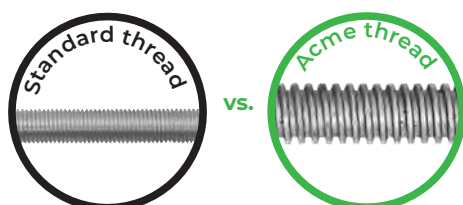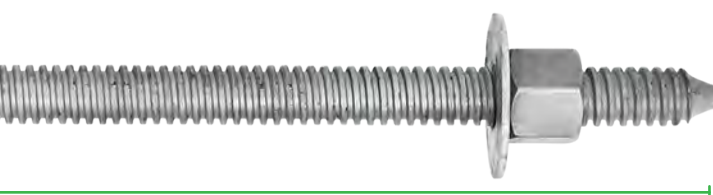

ACME THREAD STRONGER AND WIDER

The deeper thread allows the nut to travel **TWICE AS FAST!**

The trapezoidal shape gives it strength, meaning stripping is eliminated. **NO BINDING NO CLOGGING.**



“The best thing I think I've actually used is those FG2 hinges. Yeah, that's a game changer, that's quick (ACME thread). It saves a lot of time, especially when you're a one-man band. It's a lot easier.”

JACK EVANS | TAS CONTRACTOR


HINGES

TIMBER POST | GALVANISED

! Use 18mm Auger
See pg. 135



Available with 350mm thread

Available with 450mm thread

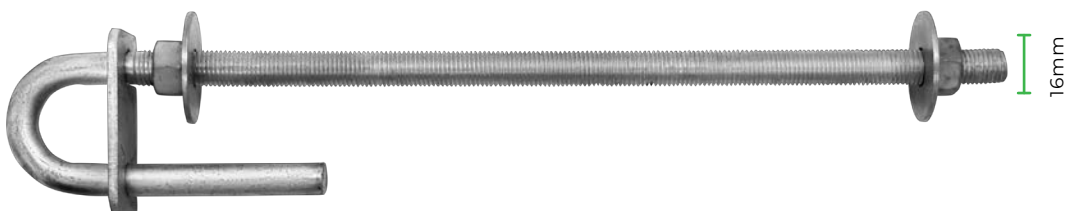

16mm

Standard thread.
Pine posts and
smaller timber posts.

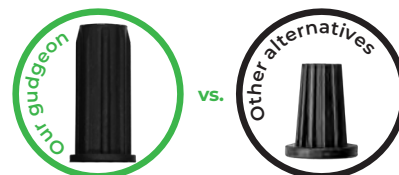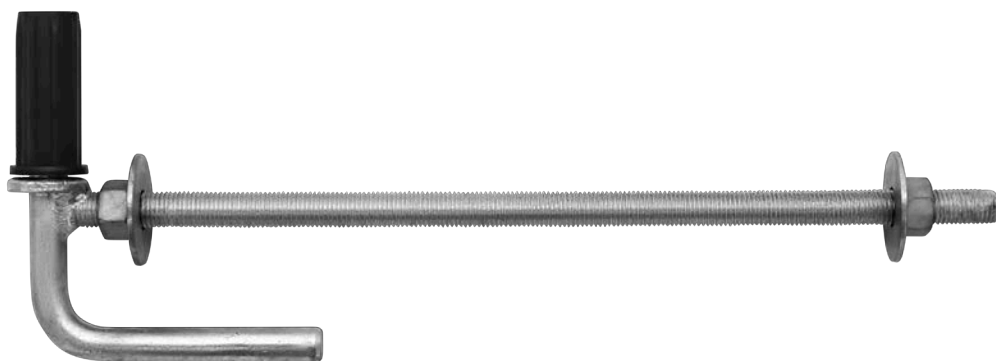

Non-tapered. Extra Secure.
Longest gudgeon 72mm.

BOLT-THRU TIMBER POST HINGE SETS



FG3E27525

BUY - 10+ | 25+ | 50+ | 100+

GATE - 25NB

POST - <225mm

THREAD - 16mm

BOX QTY - 5



FG3E40025

BUY - 10+ | 25+ | 50+ | 100+

GATE - 25NB

POST - <350mm

THREAD - 16mm

BOX QTY - 5



EXTRA LONG 100MM ANTI-TWIST ARMS

For increased gate adjustment!

EXTRA LARGE 50mm Ø WASHERS

Helps prevent gate sag as timber posts age.
Hinge won't pull through the post.

ADJUSTABLE KEEPER PLATE


Fitted on the **top strap** to keep your gate locked in
nice and tight without any **unwanted movement**.

TIMBER POST | GALVANISED

! Use 22mm Auger
See pg. 135

Available with 450mm thread

Available with 500mm thread

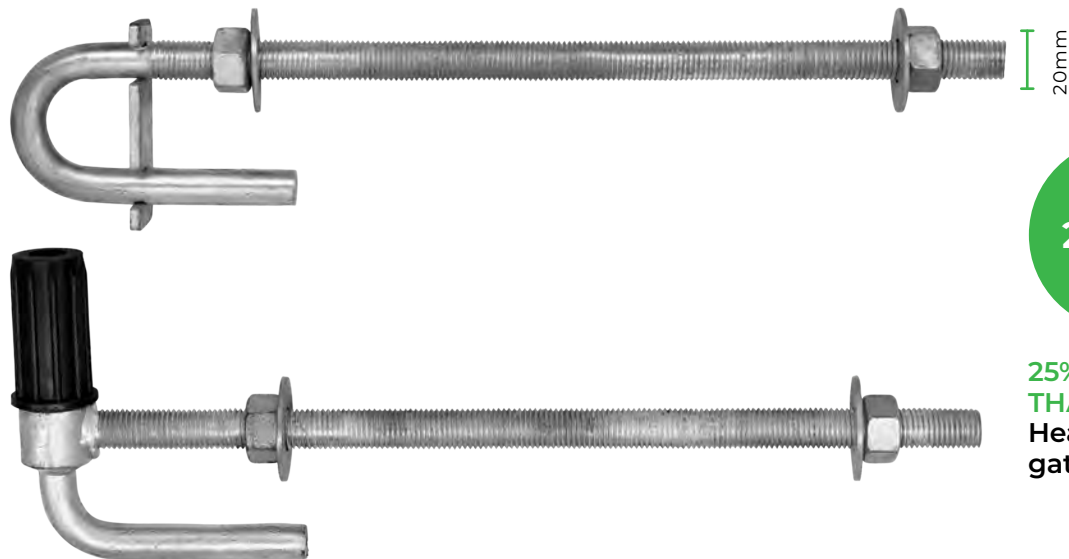

**25% MORE STEEL
THAN ALTERNATIVES.**
Heavy duty for large
gates and livestock.

BOLT-THRU TIMBER POST HINGE SETS



FG340025

BUY - 10+ | 25+ | 50+ | 100+

GATE - 25NB

POST - <350mm

THREAD - 20mm

BOX QTY - 5



FG345032

BUY - 10+ | 25+ | 50+ | 100+

GATE - 32NB

POST - <400mm

THREAD - 20mm

BOX QTY - 5



**SCAN
TO
WATCH**

BOLT-THRU TIMBER POST

75MM LOWER THAN A STANDARD HINGE

(EAST-WEST) DESIGN ALLOWS THE GATE TO SWING VERY LOW

TIMBER POST | GALVANISED

! Use 18mm Auger
See pg. 135

LOW LOC

**BOLT-THRU LOW-LOC TIMBER
POST HINGE SET**



FG3LL400

BUY - 10+ | 25+ | 50+ | 100+

GATE - 25NB

POST - <350mm

THREAD - 16mm


BOX QTY - 5



LESS SAG
50mm
WASHERS



INCREASED
ADJUSTMENT
EXTRA-LONG
ANTI-TWIST ARM

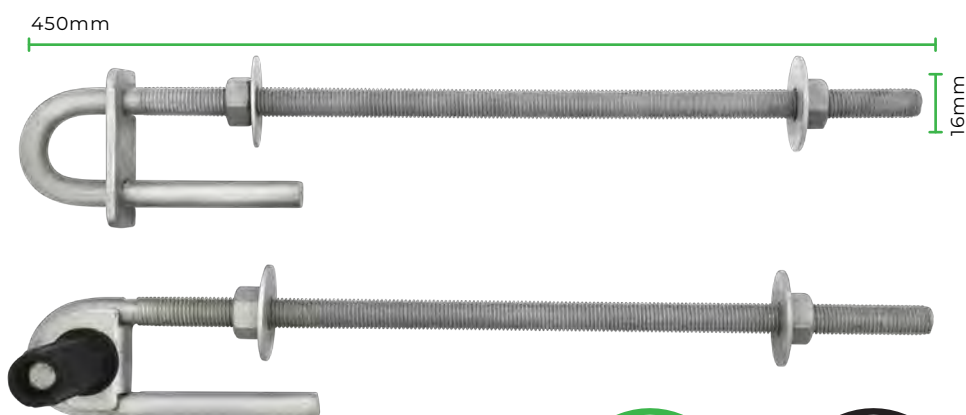


vs.



Non-tapered. Extra Secure.

Longest gudgeon 72mm.

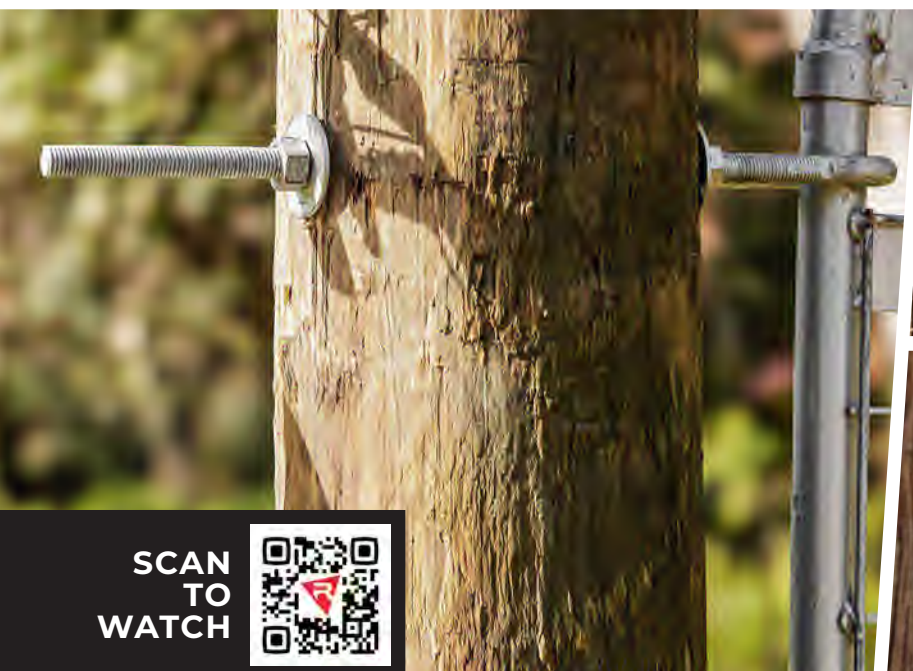

SCAN
TO
WATCH





“What I love about Rotech is the products are simple, easy and quick to install which allows me to move through jobs quicker and be able to save the customer some money on labour. I would and do highly recommend Rotech a range to others on the regular.”

A & M RURAL CONTRACTING | UPPER ORARA, NSW

FITS ALL TIMBER GATES WITH OVER 180° OPENING ANGLE




SCAN
TO
WATCH

TIMBER POST | **GALVANISED**

! Use 22mm Auger
See pg. 135

450mm

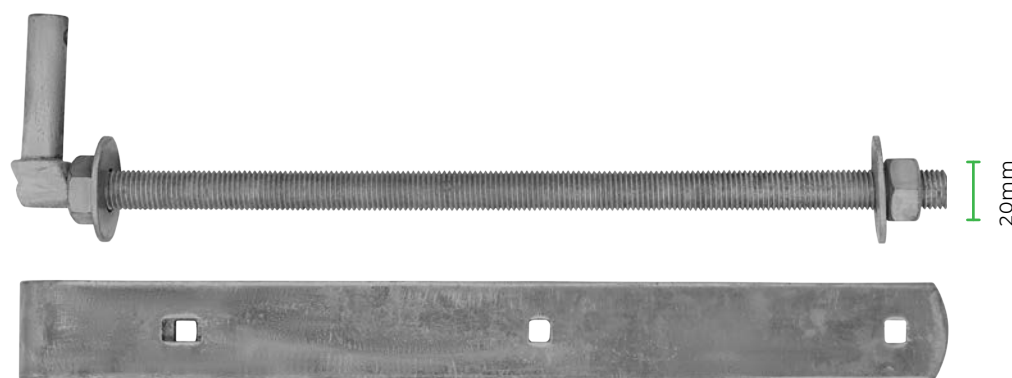

TIMBER GATE STRAP AND GUDGEON HINGE



FG7450

BUY - 6+ | 12+ | 24+ | 60+

GATE - Timber gate | POST - <410mm | THREAD - 20mm

BOX QTY - 5

**HEAVY DUTY 20MM
THICK THREAD =
25% MORE STEEL**

**SUITABLE FOR GATES
UP TO 800KG.**




Adjustable once installed
Fits posts up to 410mm.



Extra Large 50mmØ washers
Hinge won't pull through the post.
The won't gate sag as the post ages.



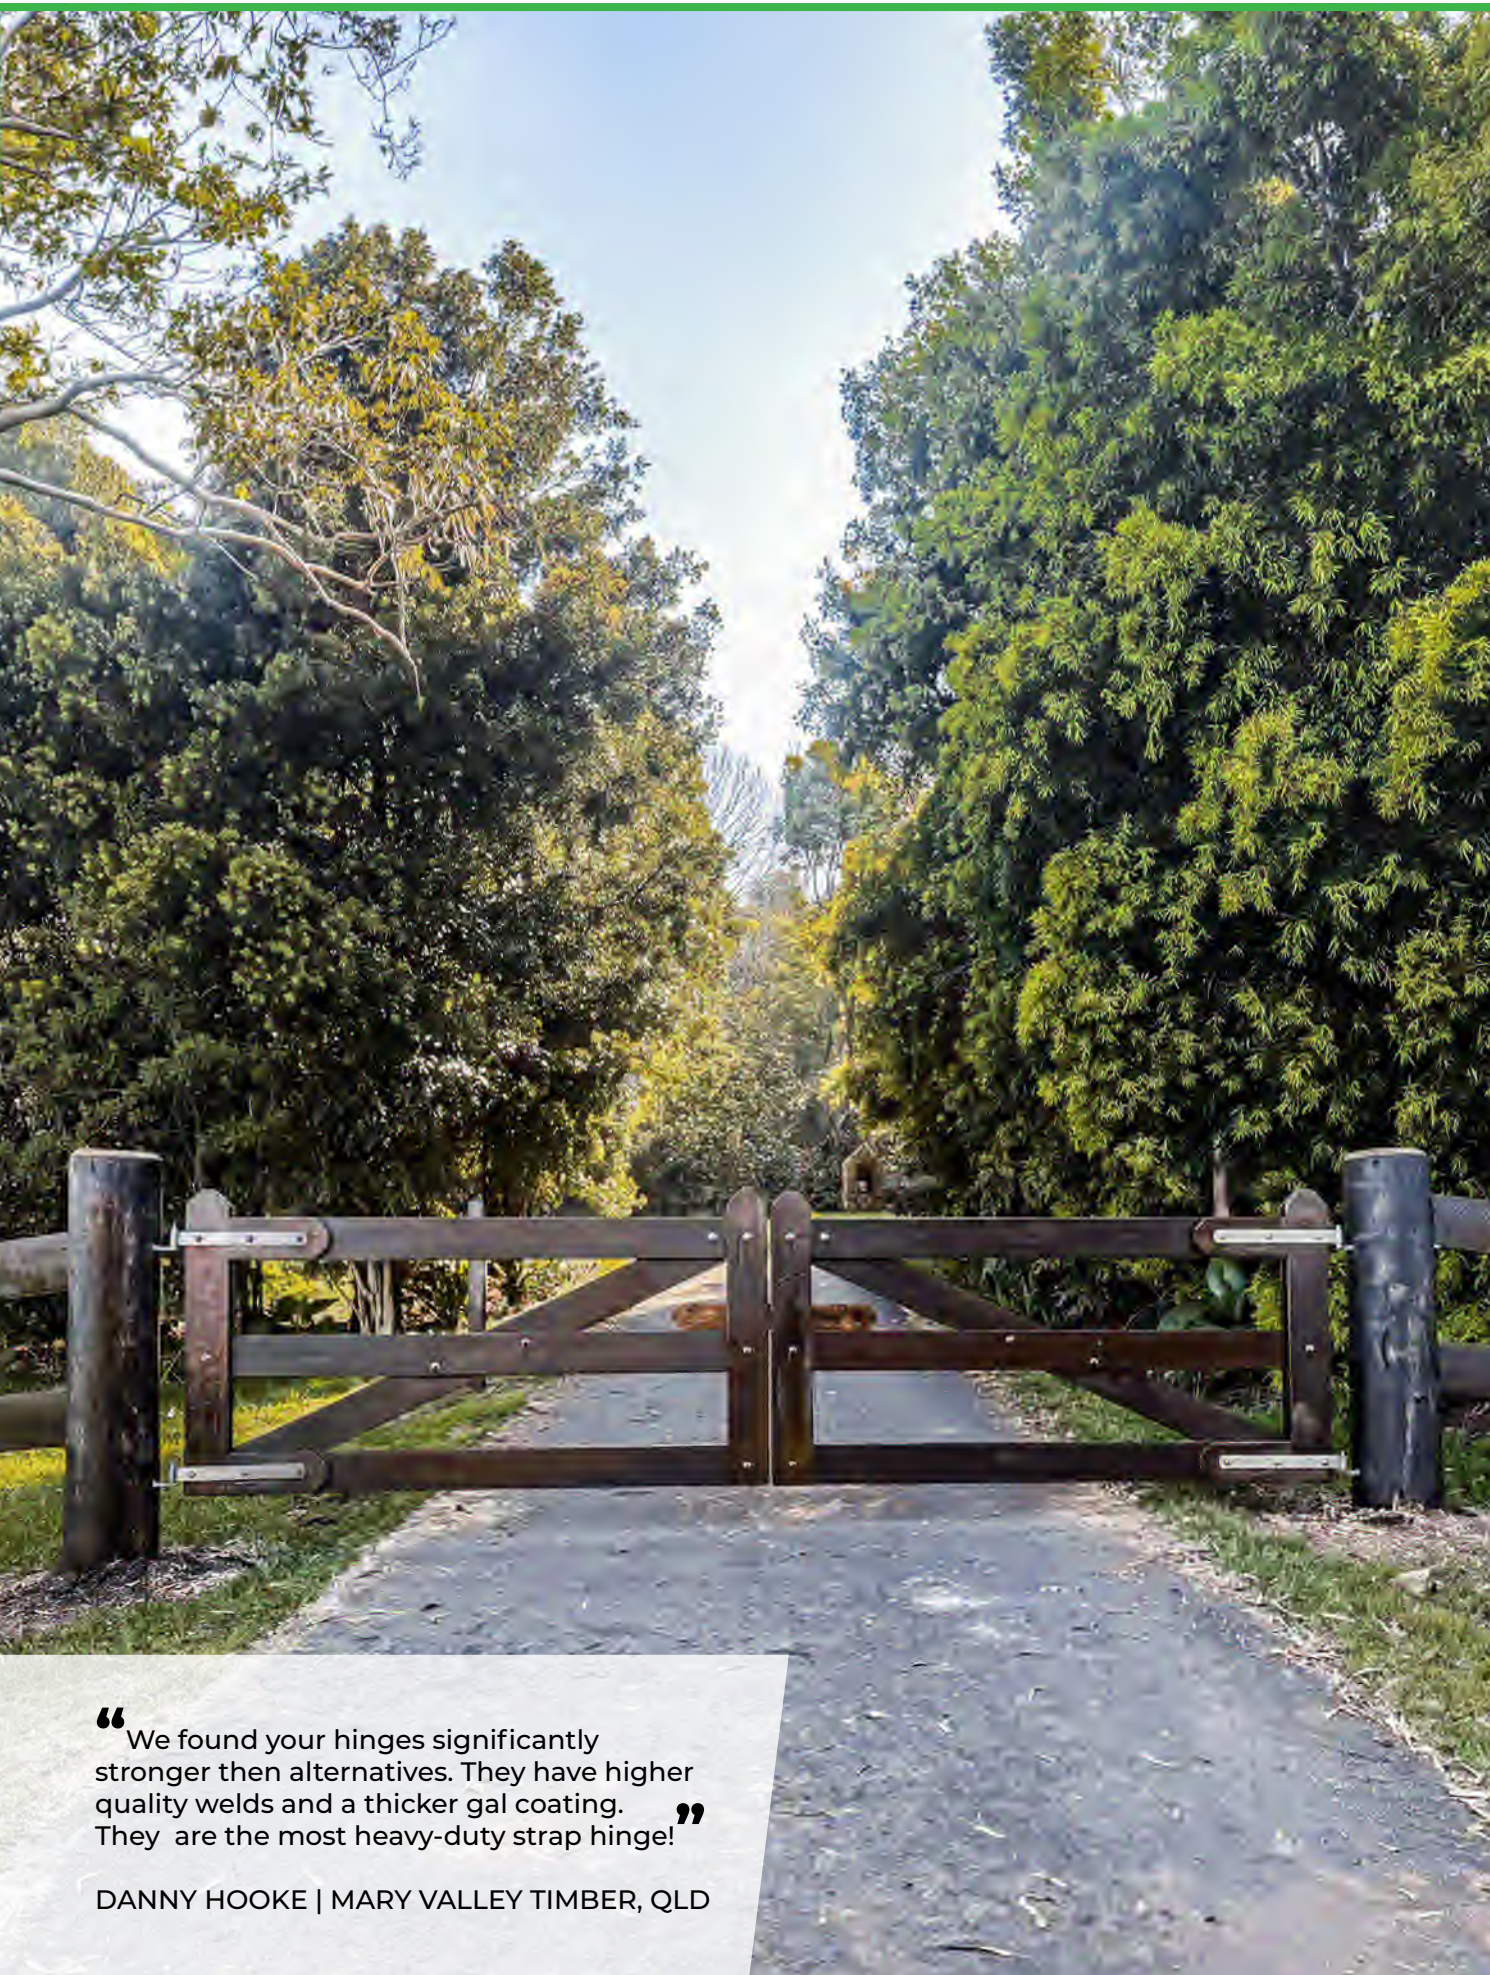

“We found your hinges significantly stronger than alternatives. They have higher quality welds and a thicker gal coating. They are the most heavy-duty strap hinge!”

DANNY HOOKE | MARY VALLEY TIMBER, QLD

AUSTRALIA'S MOST POPULAR HINGE! OVER 100,000 IN USE!

■ STEEL POST | GALVANISED

! Use 19mm Socket
See pg. 136

BOLT-ON ADJUSTABLE ROUND POST HINGE SET



FG6080

BUY - 10+ | 25+ | 50+ | 100+
GATE - 25NB
POST - 80NB
BOX QTY - 5



FG6150

BUY - 10+ | 25+ | 50+ | 100+
GATE - 25NB
POST - 150NB
BOX QTY - 5



FG6100

BUY - 10+ | 25+ | 50+ | 100+
GATE - 25NB
POST - 100NB
BOX QTY - 5



FG610032

BUY - 10+ | 25+ | 50+ | 100+
GATE - 32NB
POST - 100NB
BOX QTY - 5




19MM NUT
SUITS ROTECH
SOCKET



vs.



Non-tapered. Extra Secure.
Longest gudgeon 72mm.



LOCKABLE WASHER

Locks the gudgeon pin into place, ensuring the gate won't sag over time.

SIMPLE TO INSTALL.

NO WELDING, NO DRILLING, NO SCREWING.

All you need is a 19mm shifter.

Adjust, turn around, move up or down, take off, anytime!



SCAN
TO
WATCH



RATED FOR UP TO 20FT


STRONG

6mm hot rolled steel 20% extra body strength.
Long nut on the bottom of the hinge giving twice the holding power.
8.8 grade M12 nuts – Anti-strip

ANTI BRUISE


The interlocking design of the FG6 is smooth, with no protrusions to cause damage to your valuable stock.

NO MORE DRAGGING GATES!

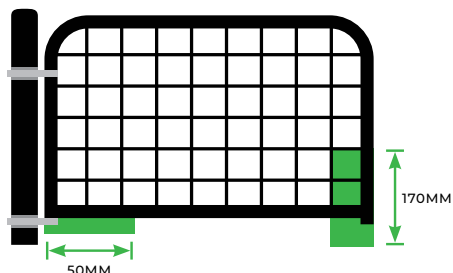

ADJUSTABLE

The pin can be adjusted and locked in 1 of 3 pre-set locations with the lockable washer.
50mm of horizontal pin adjustment
= 140mm of vertical movement at gate end (12ft).

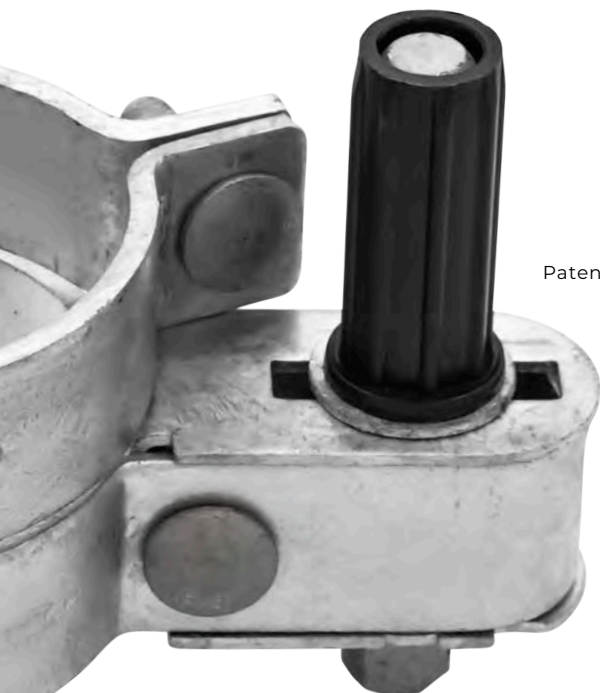

Patent protected



“The hinges are so user-friendly when installing and re-straightening the gate after it has been hit. Also very quick and easy to remove gates if need be.”

PAT CUMMINS | NSW



“Have swung 6-metre gates off these with great success. Now my preferred gate hardware.”

JOHN DUNKLEY | FORBES, NSW




HINGES

■ ANY POST | GALVANISED



COMPACT &
SIMPLE
PATENTED
3 IN 1 SADDLE

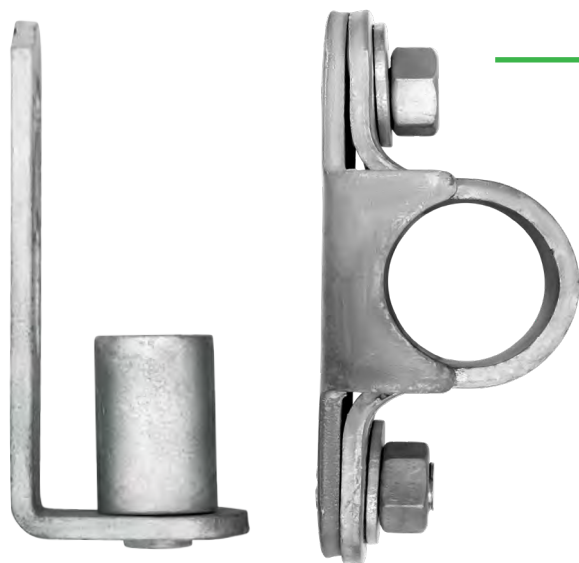

**PRE-PRESSED STUDS.
EASY 1 PERSON INSTALLATION.**

Unique 2 piece design eliminating loose saddle attachment.

More compact more strength and less chance of stock damage from protrusions.

**WELD-ON/SCREW-ON TOP SADDLE
BACKING PLATE HINGE SET**



9 348326 004908

FG11

BUY - 10+ | 25+ | 50+ | 100+

GATE - 25NB

POST - Any size

BOX QTY - 5

**BOLT-ON. SCREW-ON.
WELD-ON.**



■ STEEL POST | ZINC PLATED



HIGHLY SECURE
CAN'T REMOVE
GATE AFTER
INSTALL

WELD-ON U TYPE HINGE SET



9 348326 004144

FG10

BUY - 10+ | 25+ | 50+ | 100+

GATE - 25NB

POST - Any size

BOX QTY - 5

EXTRA SECURE!
**GATES CAN'T BE
REMOVED!**

27MM GUDGEON PIN.

Low profile & anti-bruise.

Affordable, and robust.

“ No straps around the post!
I like that it's very neat and sleek
and it can not be removed ”

COLBY HANN | CDH CONTRACTING SERVICES



MOST VERSATILE WELD-ON HINGE

■ STEEL POST | ZINC PLATED



ANTI-WEAR
WASHER &
SPLIT PIN
INCLUDED



16mm
Smaller gates, trailers,
animal pens

16MM

20mm
All-rounder, suits
standard farm gates

20MM

27mm
Heavy duty, Cattle
yards and heavy duty
applications

27MM

WELD-ON HINGE SET (2 X PIN & SOCKET)



FG16

BUY - 25+ | 50+ | 100+ | 250+

PIN - 16mm

HEIGHT - 95mm

BOX QTY - 25



FG20

BUY - 12+ | 24+ | 48+ | 120+

PIN - 20mm

HEIGHT - 115mm

BOX QTY - 12



FG27

BUY - 6+ | 12+ | 24+ | 60+

PIN - 27mm

HEIGHT - 150mm

BOX QTY - 6

**WASHER MAKES FOR
SMOOTH SWINGING.**



**SPLIT PIN KEEPS
GATE ON.**



PACKED IN PAIRS WITH
ANTI-WEAR WASHER SPLIT PIN

“Your weld-on hinges are perfectly level everytime! Unlike alternatives where I get up to 20mm sag in the gate.”

JEREMEY TAMINI | JRT RURAL

CONCRETE POST | GALVANISED


! Use 19mm Socket
See pg. 136



19MM NUT
SUITS ROTTECH
SOCKET



VERSATILE -
SUITS ALL
PRE-FABRICATED
POSTS

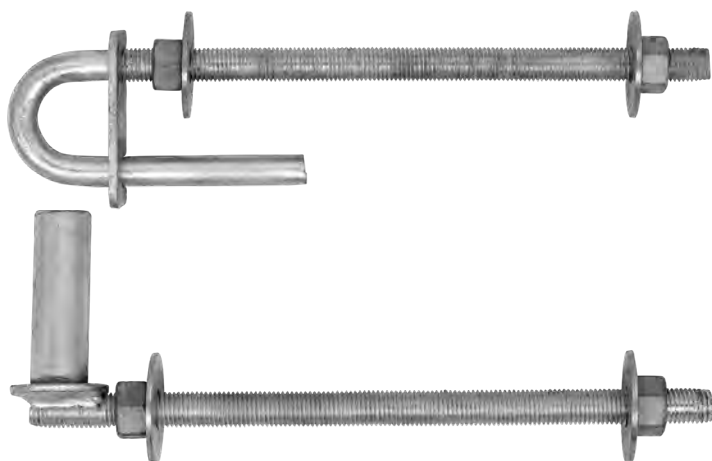

300mm bolt length
Extra length to adjust your gate.

BOLT-THRU CONCRETE POST HINGE SET



FG9

BUY - 10+ | 25+ | 50+ | 100+

GATE - 25NB

POST - <250mm

BOX QTY - 5

XL 50mmØ washers

Prevent the gate sagging or the hinge pulling through.

**100% STEEL
FIREPROOF!**



LONGEST GUDGEON - 72MM
100% Steel



KEEPER PLATE

Fitted on the **top strap** to keep your gate locked in.





80 HOOK LATCHES

82 SCREW-ON/WELD-ON HOOK LATCHES

83 SCREW-IN RING LATCH
SCREW-IN KNOB LATCH

84 SCREW-IN OVAL RING LATCH

85 SCREW-ON/WELD-ON
OVAL RING LATCH

86 CONCRETE POST LATCH

88 BOLT-ON HOOK LATCH

89 BOLT-ON PIN LATCH

90 BOLT-ON OVAL RING LATCH

LATCHES

LATCHES

■ ANY POST | GALVANISED



ADJUSTABLE
CHAIN LENGTH.
HOOK THROUGH
ANY CHAIN LINK



vs.



Hook - Quick and easy to open.

Spring Hook - Unique shaped locking spring. More secure.

HOOK LATCHES



CL350

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 350mm
LATCH TYPE - HOOK
INCLUDES - 1 LATCH
BOX QTY - 5



CL700

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 700mm
LATCH TYPE - HOOK
INCLUDES - 1 LATCH
BOX QTY - 5



CL500

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 500mm
LATCH TYPE - HOOK
INCLUDES - 1 LATCH
BOX QTY - 5



CL700S

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 700mm
LATCH TYPE - SPRING HOOK
INCLUDES - 1 LATCH
BOX QTY - 5



CL500S

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 500mm
LATCH TYPE - SPRING HOOK
INCLUDES - 1 LATCH
BOX QTY - 5

**LONGEST CHAIN =
INCREASED
ADJUSTMENT**

**VERSATILE.
SUIT ANY GATE.**



“ Love the ease of installation and the quality of the products. We will complete the full fencing project with Rotech products. ”

CAMERON & CAROL BEAHAN | QLD

TIMBER POST | GALVANISED



ADJUSTABLE
CHAIN LENGTH.
HOOK THROUGH
ANY CHAIN LINK

HOOK LATCHES WITH STAPLES



CLS500

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 500mm
LATCH TYPE - HOOK
INCLUDES -
1 LATCH, 2 STAPLES
BOX QTY - 5



CLS700

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 700mm
LATCH TYPE - HOOK
INCLUDES -
1 LATCH, 2 STAPLES
BOX QTY - 5




CLS500S

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 500mm
LATCH TYPE - SPRING HOOK
INCLUDES -
1 LATCH, 2 STAPLES
BOX QTY - 5



CLS700S

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 700mm
LATCH TYPE - SPRING HOOK
INCLUDES -
1 LATCH, 2 STAPLES
BOX QTY - 5

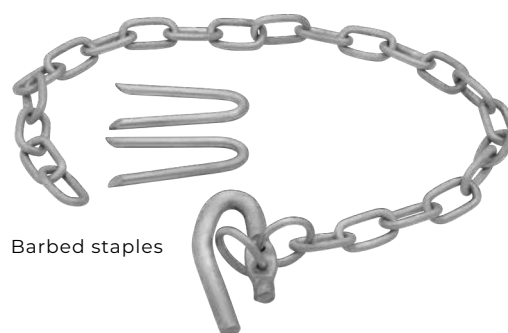

Barbed staples



vs.



Hook - Quick and easy to open.
Spring Hook - Unique shaped locking spring. More secure.



LATCHES

■ STEEL POST | GALVANISED **MOST POPULAR!**

SCREW-ON HOOK LATCH KITS



SCLK350

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 350mm
LATCH TYPE - HOOK
INCLUDES -
1 LATCH, 1 RING,
1 SADDLE, 4 SCREWS
BOX QTY - 5



SCLK500S

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 500mm
LATCH TYPE - SPRING HOOK
INCLUDES -
1 LATCH, 1 RING,
1 SADDLE, 4 SCREWS
BOX QTY - 5



Series 500 deep driller screws,
Rated for 5mm thick steel.
Fine thread for maximum clamping.

■ STEEL POST | ZINC PLATED

WELD-ON HOOK LATCH KITS



WCLK350

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 350mm
LATCH TYPE - HOOK
INCLUDES - 1 LATCH,
1 RING, 1 SADDLE
BOX QTY - 5



WCLK500S

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 500mm
LATCH TYPE -
SPRING HOOK
INCLUDES - 1 LATCH,
1 RING, 1 SADDLE
BOX QTY - 5



Designed for easy welding
Extra thick steel

LOOP AROUND GATE!

**LONGER CHAIN =
INCREASED ADJUSTMENT!**



UNIQUE PROFILED HOOK RETAINER RING.

Radius for sleek finish on
round or square.



**SCAN
TO
WATCH**

TIMBER POST | GALVANISED

! Use 10mm Auger
See pg. 135



HEAVY DUTY
IDEAL FOR
HARDWOOD

SCREW-IN RING LATCH



SCLR350

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 350mm
LATCH TYPE - HOOK
INCLUDES -
1 LATCH, 1 RING SCREW
BOX QTY - 5



SCLR350S

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 350mm
LATCH TYPE - SPRING HOOK
INCLUDES -
1 LATCH, 1 RING SCREW
BOX QTY - 5



SCAN
TO
WATCH

TIMBER POST | GALVANISED

! Use 10mm Auger
See pg. 135

SCREW-IN KNOB LATCH



KL350

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 350mm
LATCH TYPE - KNOB
INCLUDES - 1 LATCH, 1 SCREW
BOX QTY - 5



SCAN
TO
WATCH



vs.



Hook - Quick and easy to open.
Spring Hook - Unique shaped locking spring. More secure.

HEAVY DUTY COACH BOLT.

Aggressive thread design for extra hold in the post

FLAT END SECTION

For easy installation.



LATCHES

HEAVY DUTY, STOCK PROOF IDEAL FOR HARDWOOD.



SCAN
TO
WATCH

TIMBER POST | GALVANISED

! Use 14mm Auger
See pg. 135



HEAVY DUTY
IDEAL FOR
HARDWOOD

SCREW-IN OVAL RING LATCH



9 348326 004991

ORL350

BUY - 10+ | 25+ | 50+

CHAIN LENGTH - 350mm

LATCH TYPE - OVAL

INCLUDES - 1 LATCH, 1 SCREW

BOX QTY - 5

Extra thick thread 12mm Steel



**FLAT END SECTION FOR
EASY INSTALL**



**EASY-GRAB KNOB
USER-FRIENDLY, LICK-PROOF**



RADIUS FOR SLEEK FINISH ON 80NB – 100NB POST

■ STEEL POST | GALVANISED

SCREW-ON OVAL RING LATCH KIT



9 348326 005387

SORL350

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 350mm
LATCH TYPE - OVAL
INCLUDES - 1 LATCH,
1 SADDLE, 6 SCREWS
BOX QTY - 5



ADJUSTABLE
CHAIN
LENGTH. HOOK
THROUGH ANY
CHAIN LINK

Series 500 deep driller screws, **rated for use in 5mm thick steel**. Fine thread for maximum clamping force in thick steel

■ STEEL POST | ZINC PLATED

WELD-ON OVAL RING LATCH KIT



9 348326 005370

WORL350

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 350mm
LATCH TYPE - OVAL
INCLUDES -
1 LATCH, 1 SADDLE
BOX QTY - 5



Designed for Easy Welding
Extra thick steel



SCREW-ON/WELD-ON OVAL RING LATCH

LATCHES

SUITS ALL PRE-FABRICATED POSTS

■ CONCRETE POST | GALVANISED

! Use 19mm Socket
See pg. 136



19MM NUT
SUITS ROTECH
SOCKET



ADJUSTABLE
CHAIN
LENGTH. HOOK
THROUGH ANY



vs.



Hook - Quick and easy to open.

Spring Hook - Unique shaped locking spring. More secure.

CONCRETE POST LATCH



BTCL500

BUY - 10+ | 25+ | 50+

CHAIN LENGTH - 500mm

LATCH TYPE - HOOK

INCLUDES -

1 LATCH, 1 EYE BOLT

BOX QTY - 5



BTSC500

BUY - 10+ | 25+ | 50+

CHAIN LENGTH - 500mm

LATCH TYPE - SPRING HOOK


INCLUDES -

1 LATCH, 1 EYE BOLT

BOX QTY - 5



LONGER CHAIN
= INCREASED ADJUSTMENT

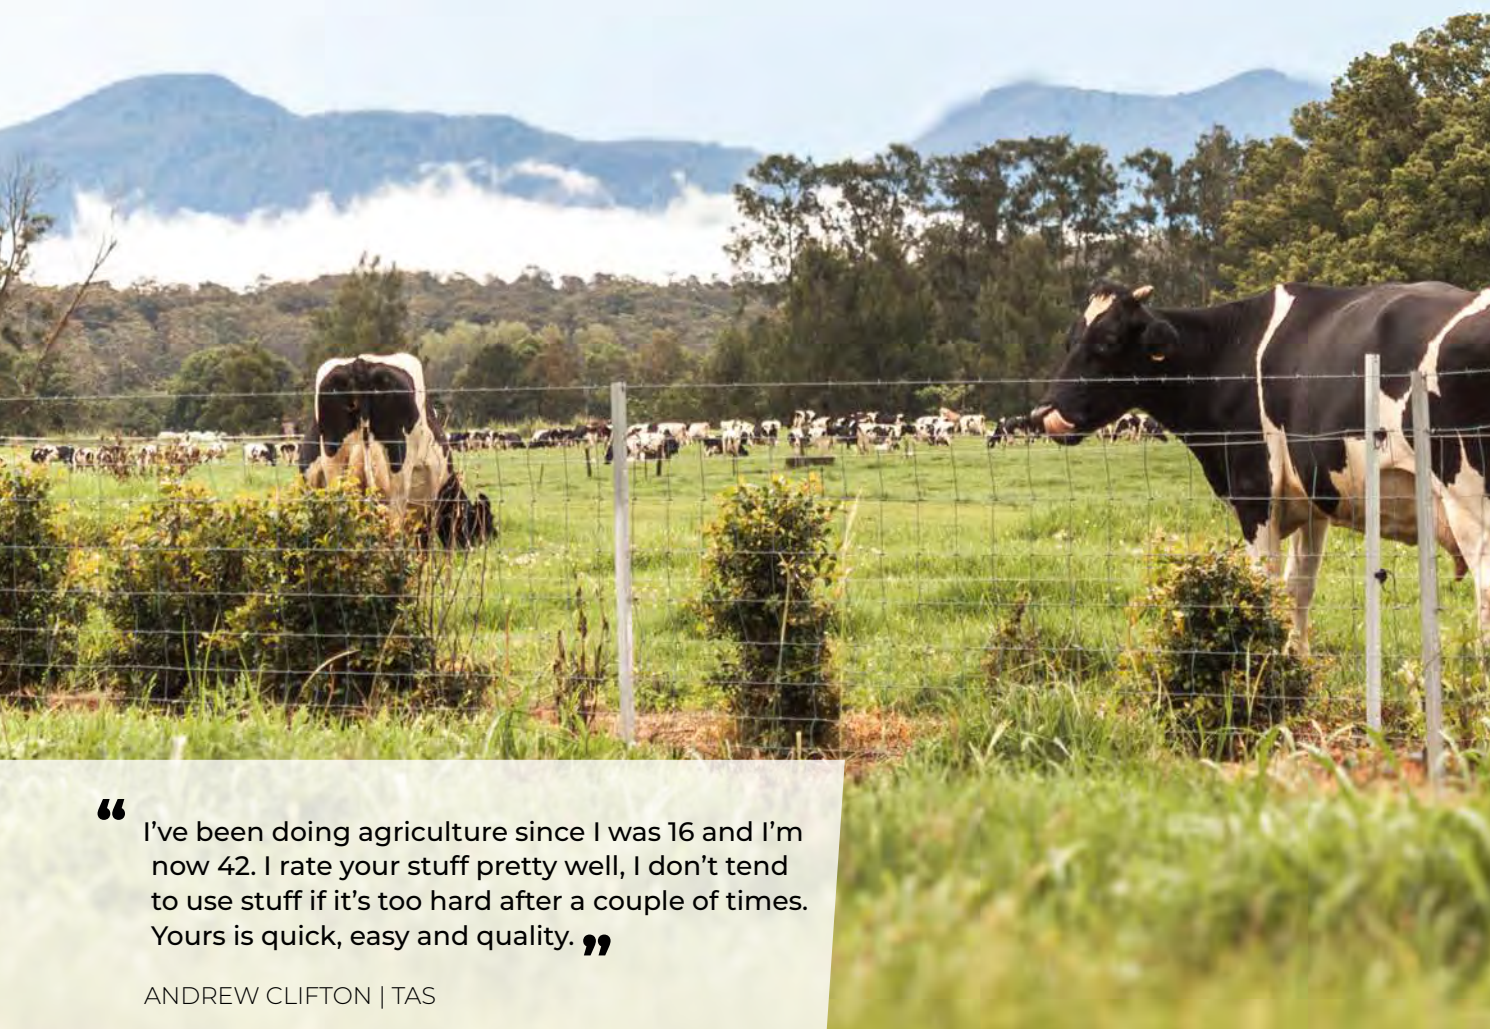

“I’ve been doing agriculture since I was 16 and I’m now 42. I rate your stuff pretty well, I don’t tend to use stuff if it’s too hard after a couple of times. Yours is quick, easy and quality.”

ANDREW CLIFTON | TAS

BOLT-ON. NO WELDING, NO DRILLING, NO SCREWING.

ANY POST | **GALVANISED**

! Use 19mm Socket
See pg. 136



19MM NUT
SUITS ROTECH
SOCKET



ADJUSTABLE
CHAIN
LENGTH. HOOK
THROUGH ANY

BOLT-ON HOOK LATCH KITS



BCL500

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 500mm
GATE Ø - 25NB
LATCH TYPE - HOOK
BOX QTY - 5



BSCL500

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 500mm
GATE Ø - 25NB
LATCH TYPE - SPRING HOOK
BOX QTY - 5



BCL70032

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 700mm
GATE Ø - 32NB
LATCH TYPE - HOOK
BOX QTY - 5



vs.



BCL700

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 700mm
GATE Ø - 25NB
LATCH TYPE - HOOK
BOX QTY - 5



BSCL700

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 700mm
GATE Ø - 25NB
LATCH TYPE - SPRING HOOK
BOX QTY - 5



INSTALL SIDEWAYS FOR EXTRA SECURITY.

If the hook is bumped up, it will hit the ring.

ADJUST THE LATCH TO GO AROUND A POST.

Suitable for **double** gates and even **three-way** gates.



ANY POST | **GALVANISED**

! Use 19mm Socket
See pg. 136



19MM NUT
SUITS ROTECH
SOCKET



ADJUSTABLE
CHAIN
LENGTH. HOOK
THROUGH ANY
CHAIN LINK



BOLT-ON PIN LATCH KITS



BPL500

BUY - 10+ | 25+ | 50+

CHAIN LENGTH - 500mm

GATE Ø - 25NB

LATCH TYPE - PIN

BOX QTY - 5

UNIQUE PIN DESIGN
MORE DIFFICULT FOR
STOCK TO LICK OPEN.



LATCH THE GATE TO YOUR FENCE
KEEP THE GATE OPEN WHILE YOUR STOCK MOVE THROUGH.



SCAN
TO
WATCH

LATCHES

■ ANY POST | GALVANISED

! Use 19mm Socket
See pg. 136



19MM NUT
SUITS ROTTECH
SOCKET



ADJUSTABLE
CHAIN
LENGTH. HOOK
THROUGH ANY



**500MM CHAIN =
INCREASED ADJUSTMENT**

BOLT-ON OVAL RING LATCH KITS



BORL500

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 500mm
GATE Ø - 25NB
LATCH TYPE - OVAL RING
BOX QTY - 5



BORL50032

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 500mm
GATE Ø - 32NB
LATCH TYPE - OVAL RING
BOX QTY - 5



BORL500HD

BUY - 10+ | 25+ | 50+
CHAIN LENGTH - 500mm
GATE Ø - 25NB
LATCH TYPE - OVAL RING
BOX QTY - 5

EASY INSTALLATION!

NO WELDING, NO DRILLING, NO SCREWING.

M12 high tensile bolt + optional tek ensures latch is extra secure and will not spin around on the gate.



SINGLE, DOUBLE OR THREE-WAY GATES.



SCAN
TO
WATCH



EASY-GRAB KNOB
USER-FRIENDLY, LICK PROOF

PAD LOCKABLE
FOR EXTRA SECURITY

FIRST NUT PRE-FITTED.
Ensuring threads are clear of
gal for entire length.

“The standard latch didn’t stand a chance against the weaners trying to get to their mum, but I replaced it with the HD Latch and other than bending the gate, they had no chance of breaking it.”

CATTLE FARMER | INGLEWOOD QLD



**AVAILABLE IN
HEAVY DUTY
8MM CHAIN**

“Stronger than the gate itself!
Tested to hold
over 1 ton of force.”

RICHARD | NSW





- 
- 94 TWO WAY CATCHES**
 - 95 PAD BOLTS
LOCKABLE GATE DROP BOLT**
 - 96 DOUBLE GATE BOW
BOLT-ON D LATCH & STRIKER**
 - 97 BOLT-ON GUDGEON
BOLT-ON BOTTOM PINS**
 - 98 LONG PLATE GUDGEONS
WELD-ON U-TYPE SADDLE & PIN**
 - 99 CHAIN/WIRE RETAINER CLIP
WIRE RETAINING CLIPS**
 - 100 BOLT THROUGH STRAP TIMBER
HINGE STRAP**
 - 101 ACCESSORIES**
 - 102 TOP SADDLES
SADDLE ATTACHMENTS**

FENCE FITTINGS & ACCESSORIES

FENCE FITTINGS AND ACCESSORIES

■ STEEL POST | GALVANISED

TWO WAY CATCHES



9 348326 002171

TWC20

BUY - 1 | 10+ | 20+

GATE Ø - 20/25NB

BASE SIZE - 78 x 108mm

BOX QTY - 10



9 348326 002188


TWC25

BUY - 1 | 10+ | 20+


GATE Ø - 25/32NB

BASE SIZE - 94 x 118mm

BOX QTY - 10

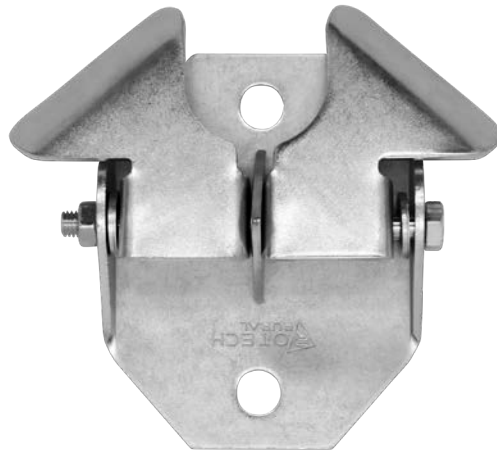

USER FRIENDLY
ALLOWS GATE
TO SWING
BOTH WAYS

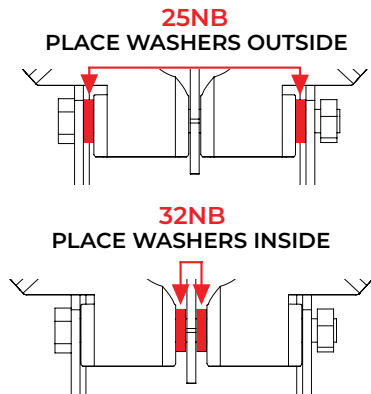

“ We have been using Rotech since 2015. We have fenced over 150 hectares since then and would highly recommend them. We have had no failures at all. A great product and a great company to work with. ”

BILL WILLIAMS | VIC


SELF LATCHING

1. The gate hits the beveled lug, pushes the lug up, **ALLOWING THE GATE TO SLIDE IN.**
2. Once in, the **LUG WILL DROP BACK DOWN**, holding the gate in place.



FENCE FITTINGS AND ACCESSORIES

■ ANY POST | ZINC PLATED

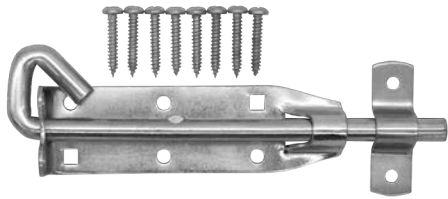

IDEAL FOR SMALL
GATES & CAGES

PAD BOLTS



PB150

BUY - 1 | 10+ | 20+

OVERALL LENGTH - 150mm

PIN STICK OUT - 60mm

BOX QTY - 10



PB200

BUY - 1 | 10+ | 20+

OVERALL LENGTH - 200mm

PIN STICK OUT - 60mm

BOX QTY - 10

■ ANY POST | GALVANISED



! Pair with Double
Gate Bow (GB25)
See pg. 96



IDEAL FOR
DOUBLE GATES

LOCKABLE GATE DROP BOLT




CDB400

BUY - 1 | 10+ | 20+


OVERALL LENGTH - 400mm

PIN Ø - 12mm

BOX QTY - 10

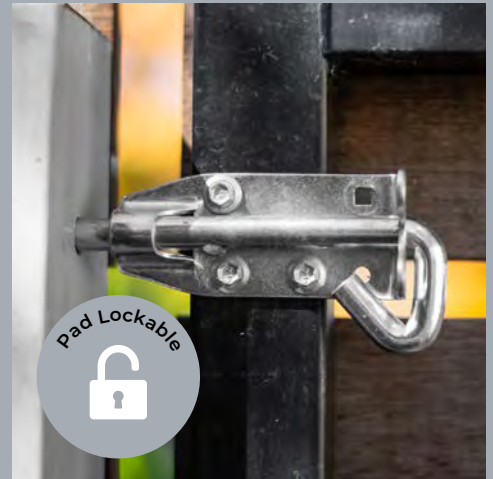

DESIGNED TO BE
USED VERTICALLY
ON YOUR GATES.

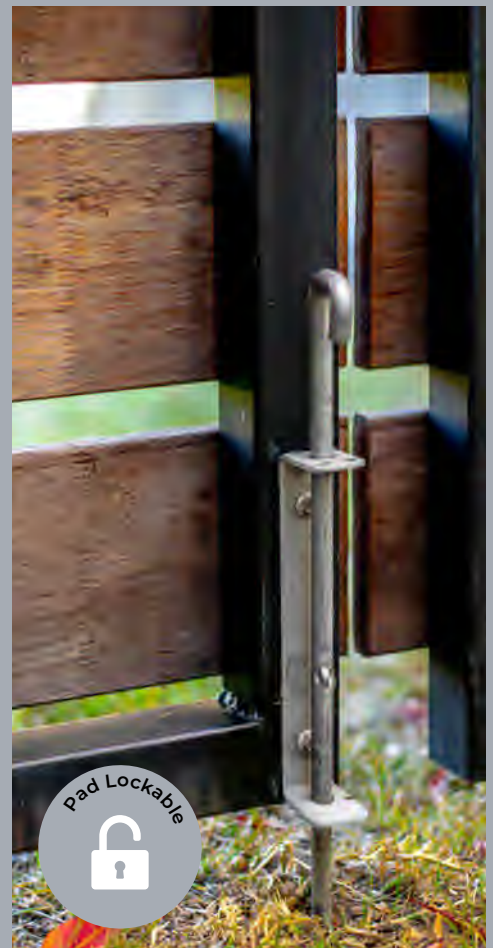

FENCE FITTINGS AND ACCESSORIES

■ ANY POST | GALVANISED

! Pair with Lockable Gate Drop Bolt GDB400 See pg. 95



SMOOTH EASY SWING
DROP-ON,
LIFT-OFF LATCH



IDEAL FOR
DOUBLE GATES



DOUBLE GATE BOW



9 348326 003284

GB25


BUY - 1 | 20+ | 40+

GATE - 25NB


INCLUDES - 1 Gate Bow,

1 Bolt & Nut

BOX QTY - 20

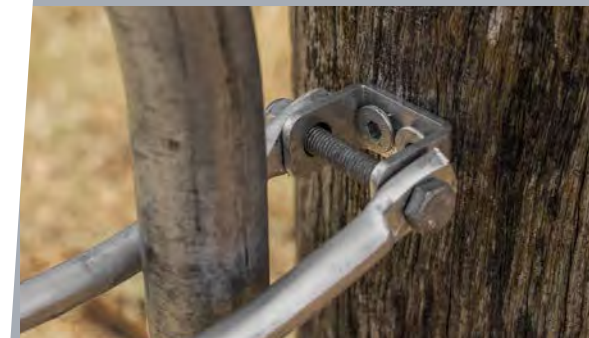

■ ANY POST | GALVANISED

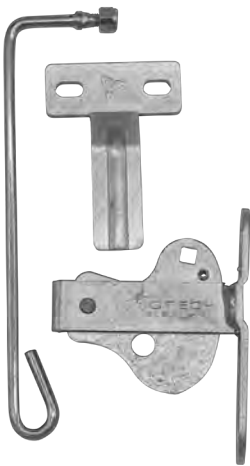

BOLT-ON D LATCH & STRIKER



9 348326 002164

BDLHD

BUY - 1 | 10+ | 20+ | 50+

GATE - 25NB

BOX QTY - 20



FENCE FITTINGS AND ACCESSORIES

■ ANY POST | GALVANISED

BOLT-ON GUDGEON (WITH BUSH)



9 348326 003017

BOG25

BUY - 1 | 50+

GATE - 25NB | PIN Ø - 18mm

BOX QTY - 50



NYLON GUDGEON BUSH



9 348326 006353

NG2519

BUY - 1 | 25+

GATE - 25NB | PIN Ø - 18mm

BOX QTY - 25



Replacements Available for
all hinge sets on request

■ ANY POST | GALVANISED

BOLT-ON BOTTOM PINS



9 348326 002973

BOBP20

BUY - 1 | 50+

GATE - 20NB

PIN Ø - 20mm

BOX QTY - 50



9 348326 002980

BOBP25

BUY - 1 | 50+

GATE - 25NB

PIN Ø - 27mm

BOX QTY - 50



9 348326 002997

BOBP32

BUY - 1 | 30+

GATE - 32NB

PIN Ø - 32mm

BOX QTY - 30



VERSATILE -
WELD OR
BOLT-ON



SMOOTH SWING
NYLON BUSH

“We love your Gudgeons on our new front gate hinges at Willow Tree. The ease of opening every day is a pleasure.”

JAMES HUNTER



**RADIUS BACK PLATE
NEATER FIT!**



WHY DOES YOUR 25NB GATE PIN HAVE A 27MM PIN?

The 27mm pin provides a tighter fit with your 25NB gate.

FENCE FITTINGS AND ACCESSORIES

■ ANY POST | GALVANISED

LONG PLATE GUDGEONS (WELD/SCREW-ON)



9 348326 002928

WOG20L

BUY - 1 | 50+

GATE - 20NB

PIN Ø - 20mm

BOX QTY - 50



9 348326 002935

WOG25L

BUY - 1 | 50+

GATE - 25NB

PIN Ø - 27mm

BOX QTY - 50



Why does your 25NB gate pin have a 27mm pin?

The 27mm pin provides a tighter fit with your 25NB gate.

VERSATILE. WELD OR SCREW.

GUDGEON SCREWS FITTED BEHIND THE GATE.

More difficult to remove while the gate is sitting on the gudgeon.



■ STEEL POST | ZINC PLATED

WELD-ON U-TYPE SADDLE & PIN



9 348326 003048

UTS25

BUY - 1 | 25+

GATE - 25NB

BOX QTY - 25



9 348326 003031

UWOBP25

BUY - 1 | 25+

GATE - 25NB

PIN Ø - 27mm



HIGHLY SECURE
CAN'T REMOVE
GATE AFTER
INSTALL



ECONOMICAL



FENCE FITTINGS AND ACCESSORIES

5MM THICK!
USE ANY LINK.

■ STEEL POST | GALVANISED



WELD-ON/SCREW-ON CHAIN/WIRE RETAINER CLIP



9 348326 005950

CRC

BUY - 100+ | 200+ | 500+

WIRE - $\leq 5\text{mm}$ | MATERIAL - 5mm

BOX QTY - 50

■ STEEL POST | GALVANISED



CLAMSHELL

WIRE RETAINING CLIP 25MM WITH SCREWS X 50




9 348326 006582

WRC25S50

BUY - 1 | 10+ | 20+ | 50+

WIRE - $\leq 5\text{mm}$ | MATERIAL - 5mm

BOX QTY - 10

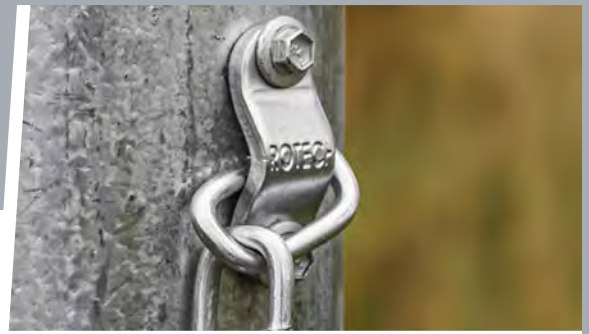

“ Very happy with these!
They are thick enough that you can
weld them if you want to! ”

JACK BULST



PLASTIC TUB

WIRE RETAINING CLIP 25MM



9 348326 006490

WRC25I000

BUY - 1 | 2+ | 4+

WIRE - $\leq 5\text{mm}$ | MATERIAL - 5mm

BOX QTY - 1



RETAINER CLIPS

FENCE FITTINGS & ACCESSORIES

FITS ALL TIMBER GATES WITH OVER 180° OPENING ANGLE



SCAN
TO
WATCH

■ TIMBER POST | GALVANISED

! Use 22mm Auger
See pg. 135

! Use with Timber
Strap THS450
See below



BOLT THROUGH STRAP & GUDGEON



TG450

BUY - 1 | 10+

POST - $\leq$ 380mm

HOLE $\varnothing$ - 22mm

BOX QTY - 10

Adjustable once installed

Fits posts up to 410mm.

Heavy duty 20mm thick thread = 25% more steel
Suitable for up to 800kg gate weight.

Extra Large 50mm $\varnothing$ washers

Ensure the hinge won't pull through the post, and prevent the gate sagging as the post ages.

■ TIMBER POST | GALVANISED

! Use with Timber
Gudgeon TG450
See above



TIMBER HINGE STRAP



THS450

BUY - 1 | 10+

LENGTH - 450mm

BOLT - M10

PIN $\varnothing$ - 20mm

BOX QTY - 10



THS600

BUY - 1 | 10+

LENGTH - 600mm

BOLT - M10

PIN $\varnothing$ - 20mm

BOX QTY - 5



THS900


BUY - 1 | 10+

LENGTH - 900mm

BOLT - M10

PIN $\varnothing$ - 20mm

BOX QTY - 5

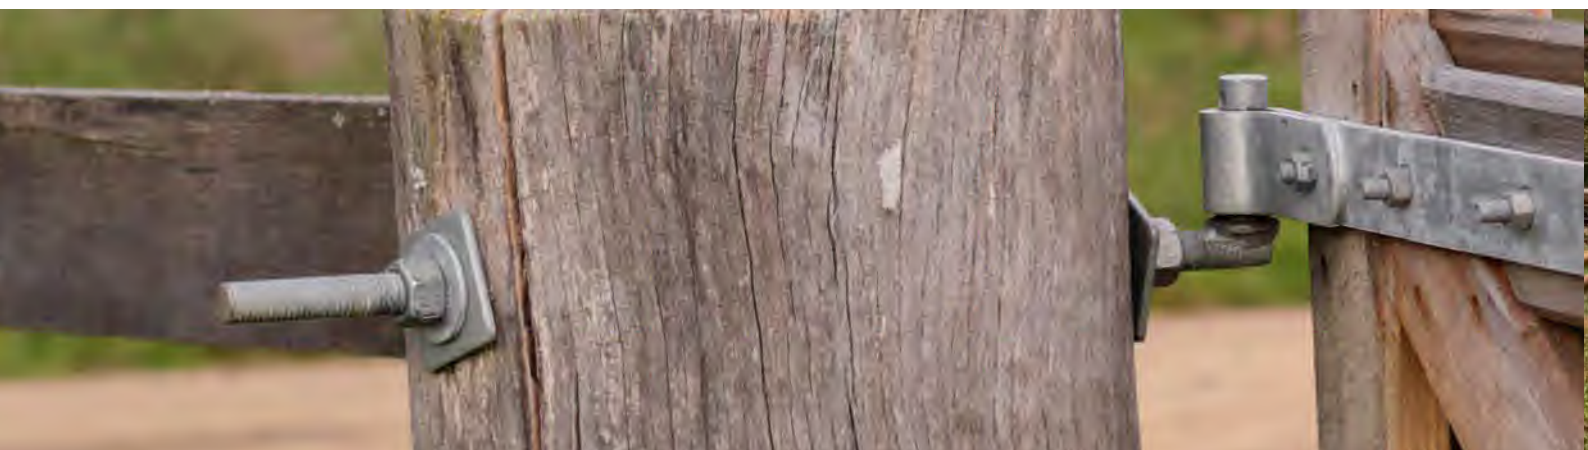

FENCE FITTINGS AND ACCESSORIES

TIMBER POST | GALVANISED



SCREW-IN/DRIVE-IN GUDGEON



Use 25mm Auger
See pg. 135




SDG25

BUY - 1+ | 25+

GATE - 25NB | PIN Ø - 27mm

BOX QTY - 25



SCREW-IN RING



Use 10mm Auger
See pg. 135



SR12G


BUY - 10+ | 25+ | 50+

THREAD Ø - 12mm

BOX QTY - 50



VERSATILE -
USE ON ANY
SIZE POST



HEAVY DUTY BARBED STAPLE



ST

BUY - 10+ | 25+ | 50+

MATERIAL - 8mm | LENGTH - 105mm

BOX QTY - 25



COACH SCREW



F M10075 CS G

BUY - 1 | 50+

SIZE - M10 x 75

BOX QTY - 50



F M12075 CS G

BUY - 1 | 50+

SIZE - M12 x 75

BOX QTY - 50



FENCE FITTINGS AND ACCESSORIES

COMBINES BACKING PLATE AND SADDLE INTO A SINGLE PIECE.

THIS COMBINATION RESULTS IN AN EXTREMELY STRONG TOP HINGE SET.

■ ANY POST | GALVANISED



COMPACT &
SIMPLE
PATENTED
3 IN 1 SADDLE



TOP SADDLE & BACKING PLATE KIT



9 348326 004892

TSBP25HD

BUY - 1 | 25+

GATE - 25NB

INCLUDES - 1 Top Saddle,

1 Backing Plate, 2 Bolts & Nuts

BOX QTY - 25



EASIER. STRONGER

Pre-pressed studs for easy 1 person installation.

Unique 2 piece design eliminating loose saddle attachment.

More strength and less chance of stock damage from protrusions.



**BOLT-ON. SCREW-ON.
WELD-ON.**



FENCE FITTINGS AND ACCESSORIES

■ ANY POST | GALVANISED

TOP SADDLES



EASY TO
INSTALL ON
STEEL OR TIMBER



HEAVY DUTY



9 348326 003062

TS20HD

BUY - 1 | 50+

GATE - 20NB

SUITS - SA20

BOX QTY - 50



9 348326 003079

TS25HD

BUY - 1 | 50+

GATE - 25NB

SUITS - SA25

BOX QTY - 50



9 348326 004762

TSR25HD*

BUY - 1 | 50+

GATE - 25NB

SUITS - SA25

BOX QTY - 50



9 348326 003086

TS32HD

BUY - 1 | 50+

GATE - 32NB

SUITS - SA32

BOX QTY - 20



9 348326 003093

TS40HD

BUY - 1 | 50+

GATE - 40NB

SUITS - SA32

BOX QTY - 20



9 348326 003109

TS50HD

BUY - 1 | 50+

GATE - 50NB

SUITS - SA32

BOX QTY - 20



*radius saddle



NEW AND IMPROVED!

RADIUS SADDLE providing a **sleeker fit**.

COACH SCREWS M12 75mm coach screws.
20% stronger than alternatives.

■ ANY POST | GALVANISED

SADDLE ATTACHMENTS



9 348326 003116

SA20

BUY - 1 | 50+

GATE - 20NB

SUITS - TS20HD

BOX QTY - 50



9 348326 003123

SA25

BUY - 1 | 50+

GATE - 25NB

SUITS - TS25HD

BOX QTY - 50



9 348326 003130

SA32

BUY - 1 | 50+

GATE - 32NB

SUITS - TS32HD

BOX QTY - 20



TOP SADDLES



- 
- 
- 106** WELD-ON HINGES
 - 107** BULLET HINGES
 - 108** BALL BEARING HINGES
 - 109** ANTI-LOOSE LATCHES
OVER-CENTRE LATCHES
 - 110** SPRING BOLTS
 - 112** CAM LATCHES
 - 114** T HANDLE CAM LATCH
 - 115** STRIKER PLATES
 - 116** PANEL CLIPS
 - 118** WELD-ON CHAIN CATCHES
 - 119** SHEEP YARD PANEL CLIP
GATE CASTOR WHEEL

STOCKYARD FITTINGS

■ STEEL POST | ZINC PLATED

WELD-ON HINGES



WOH12

BUY - 50+ | 100+ | 200+ | 500+

PIN Ø - 12mm

HEIGHT - 75mm

BOX QTY - 50



WOH20

BUY - 50+ | 100+ | 200+ | 500+

PIN Ø - 20mm

HEIGHT - 115mm

BOX QTY - 24



WOH16

BUY - 50+ | 100+ | 200+ | 500+

PIN Ø - 16mm

HEIGHT - 95mm

BOX QTY - 50



WOH27

BUY - 50+ | 100+ | 200+ | 500+

PIN Ø - 27mm

HEIGHT - 150mm

BOX QTY - 12



ANTI-WARE
WASHER &
SPLIT PIN
INCLUDED



12 - 16mm

Smaller gates, trailers,
animal pens

20mm

All-rounder, suits
standard farm gates

27mm

Heavy duty – Cattle yards
and heavy duty gates

12 -
16MM

20MM

27MM



■ STEEL POST | ZINC PLATED

BULLET HINGES - BRASS PIN



BHP080

BUY - 12+ | 24+ | 48+ | 120+

PIN Ø - 8mm

LENGTH - 80mm

NIPPLE GREASE - No

BOX QTY - 10



BHP080

BUY - 12+ | 24+ | 48+ | 120+

PIN Ø - 8mm

LENGTH - 80mm

NIPPLE GREASE - Yes

BOX QTY - 10



BHBP100

BUY - 12+ | 24+ | 48+ | 120+

PIN Ø - 10mm

LENGTH - 100mm

NIPPLE GREASE - No

BOX QTY - 10



BHBP100

BUY - 12+ | 24+ | 48+ | 120+

PIN Ø - 10mm

LENGTH - 100mm

NIPPLE GREASE - Yes


BOX QTY - 10



LOW PROFILE



IDEAL FOR
TOOLBOXES

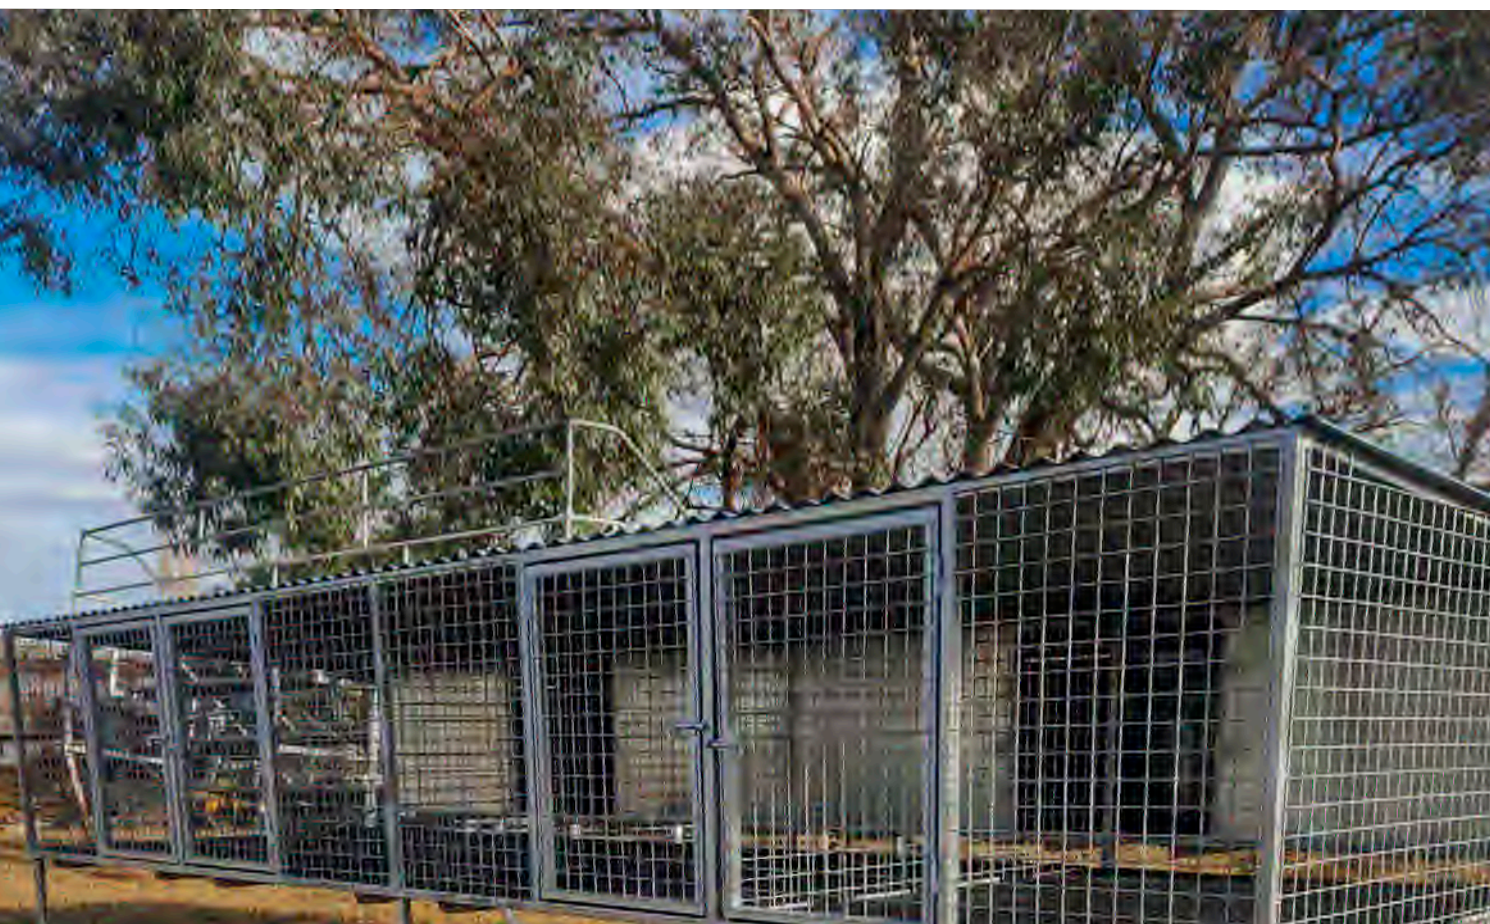

■ ANY POST | ZINC PLATED



LOW PROFILE



VERSATILE WELD
OR BOLT ON



BALL BEARING HINGES (PAIR)



9 348326 002263

BBHBL

BUY - 12+ | 24+ | 48+ | 120+

SIZE (W x H) - 105 x 85mm

POSITION - Left

TYPE - Bolt-on

BOX QTY - 10



9 348326 002256

BBHBR

BUY - 12+ | 24+ | 48+ | 120+


SIZE (W x H) - 105 x 85mm

POSITION - Right

TYPE - Bolt-on

BOX QTY - 10

SCREW ONTO TIMBER OR STEEL

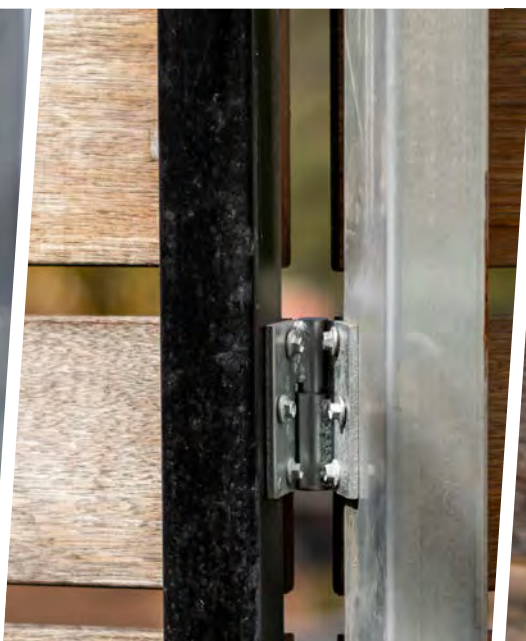

SECURE MADE EASY!

ZINC PLATED



ANTI-LOOSE LATCHES



ALWL08

BUY - 1 | 10+ | 20+

PIN Ø - 8mm

OPEN LENGTH - 67mm

LATCH WIDTH - 14mm

BOX QTY - 10



ALWL12

BUY - 1 | 10+ | 20+

PIN Ø - 12mm

OPEN LENGTH - 91mm

LATCH WIDTH - 20mm

BOX QTY - 10



IDEAL FOR
UTE TRAYS



SECURE
PAD LOCKABLE

ZINC PLATED



OVER-CENTRE LATCHES



OCLS

BUY - 1 | 10+ | 20+

SIZE - Small

MIN-MAX LENGTH - 83 - 90mm

BOX QTY - 10



OCLM

BUY - 1 | 10+ | 20+

SIZE - Medium

MIN-MAX LENGTH - 106 - 122mm

BOX QTY - 10



OCLL

BUY - 1 | 10+ | 20+

SIZE - Large

MIN-MAX LENGTH -

145 - 165mm

BOX QTY - 10



VERSATILE WELD
OR SCREW ON



SECURE
PAD LOCKABLE



STOCKYARD FITTINGS

■ STEEL POST | ZINC PLATED

SPRING BOLTS



9 348326 000436

LDSB9.5

BUY - 1 | 10+ | 20+ | 50+

PIN Ø - 9.5mm

PIN STICK OUT - 30mm

TOTAL LENGTH - 130mm

POSITION - Left or right

BOX QTY - 10



9 348326 000443

LDSB12

BUY - 1 | 10+ | 20+ | 50+

PIN Ø - 12mm

PIN STICK OUT - 28mm

TOTAL LENGTH - 166mm

POSITION - Left or right



BOX QTY - 10



VERSATILE AND
COMPACT



EASY TO INSTALL

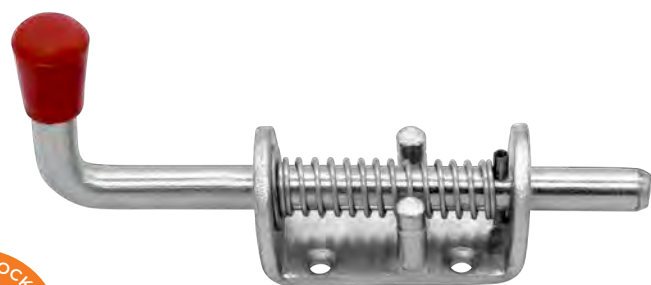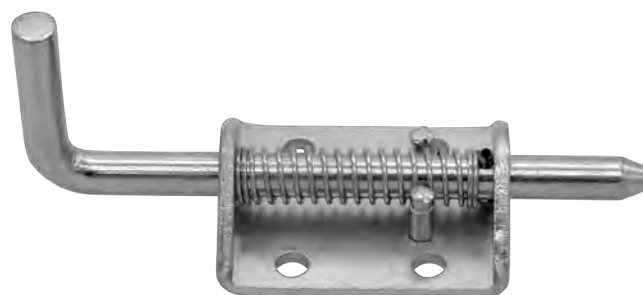

EASY GRAB HANDLE





“What’s most important for us is consistency between products, because we use robots which have low tolerance for inaccuracies. Rotech’s fittings have been very consistent and reliable.”

MAL NEWING | THOMPSON LONGHORN

STOCKYARD FITTINGS

■ STEEL POST | ZINC PLATED

14MM CAM LATCH



9 348326 000306

ECL14

BUY - 1 | 10+ | 20+ | 100+

PIN STICK OUT - 100mm


OVERALL LENGTH - 250mm

HANDLE - Enclosed

POSITION - Left or right

BOX QTY - 10

Solid hold handle

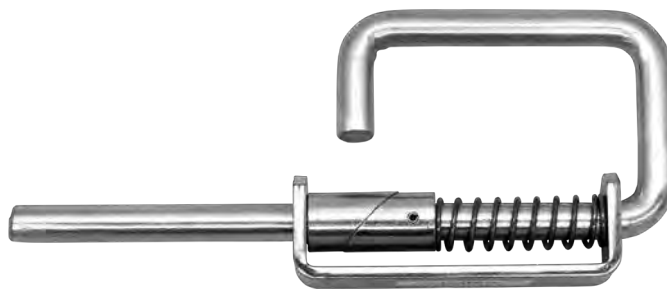

MULTI-
POSITIONAL
LEFT OR RIGHT



LONG LIFE. STAINLESS STEEL SPRINGS



PAIR WITH STRIKER

Spring loaded pin pushes into hole



FULLY ENCLOSE YOUR LATCH

Perfect for cattle or sheep yards. Clean and neat.

2 PIN LENGTHS

COMPACT FIT OR A LONG BOLT TO TRAVEL THROUGH YOUR GATE.

■ STEEL POST | ZINC PLATED

20MM CAM LATCHES



CL20S

BUY - 1 | 10+ | 20+ | 100+

PIN STICK OUT - 50mm

OVERALL LENGTH - 220mm

HANDLE - Open

POSITION - Left or right

BOX QTY - 10



CL20L

BUY - 1 | 10+ | 20+ | 100+

PIN STICK OUT - 100mm

OVERALL LENGTH - 270mm

HANDLE - Open

POSITION - Left or right

BOX QTY - 10



ECL20L

BUY - 1 | 10+ | 20+ | 100+

PIN STICK OUT - 100mm

OVERALL LENGTH - 270mm


HANDLE - Enclosed

POSITION - Left or right

BOX QTY - 10




MULTI-
POSITIONAL
LEFT OR RIGHT

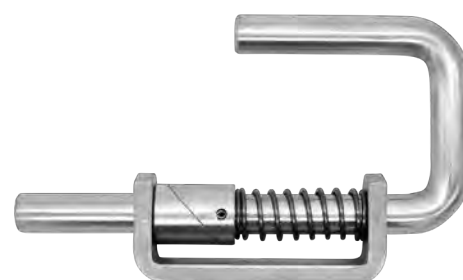

220mm

Available with an open or enclosed handle

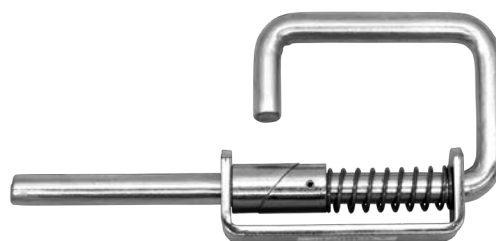

270mm



STAINLESS STEEL SPRINGS

HEAVY DUTY 32MM X 10MM
LATCH BODIES

PRECISION TOLERANCE 1020 GRADE
BRIGHT BAR PINS AND HANDLES

AUSTRALIAS MOST HEAVY DUTY!

■ STEEL POST | ZINC PLATED

T HANDLE CAM LATCH



9 348326 006469

TCL25

BUY - 1 | 10+ | 20+ | 100+

PIN STICK OUT - 50mm

OVERALL LENGTH - 300mm

HANDLE - 25mm T Handle

POSITION - Multi-Positional

BOX QTY - 10



8MM BASE
EXTRA THICK NO WRAPPING



USE A STRIKER PLATE TO AVOID LATCH WEARING THROUGH

STEEL POST | ZINC PLATED

STRIKER PLATES



SP14

BUY - 1 | 10+ | 20+ | 100+
LATCH - 14mm
SIZE (W x H) - 78 x 50mm
DIRECTION - Single
BOX QTY - 10



SP20

BUY - 1 | 10+ | 20+ | 100+
LATCH - 20mm
SIZE (W x H) - 105 x 65mm
DIRECTION - Single
BOX QTY - 10



SP25

BUY - 1 | 10+ | 20+ | 100+
LATCH - 25mm
SIZE (W x H) - 100 x 75mm
DIRECTION - Single
BOX QTY - 10

20MM ANTI-RATTLE STRIKER PLATE



ARS20

BUY - 1 | 10+ | 20+
LATCH - 20mm
SIZE (W x H) - 70 x 65mm
DIRECTION - Single
BOX QTY - 10



DSSP14

BUY - 1 | 10+ | 20+ | 100+
LATCH - 14mm
SIZE (W x H) - 68 x 50mm
DIRECTION - Double
BOX QTY - 10



DSSP20

BUY - 1 | 10+ | 20+ | 100+
LATCH - 20mm
SIZE (W x H) - 75 x 75mm
DIRECTION - Double
BOX QTY - 10



HEAVY DUTY
SINGLE DIRECTION

Gate to operate one way



Gate to operate two ways



6MM THICK

HEAVIER - STRONGER THAN ALTERNATIVE 40MM CLIPS

■ **STEEL POST** | **ZINC PLATED**

! Use with 16mm
Drop Pin
See pg. 117

PANEL CLIPS



9 348326 000528

CP40ZP

BUY - 1 | 50+ | 100+ | 1000+

WIDTH - 40mm

MATERIAL - 6mm

PIN Ø - 16mm

BOX QTY - 50



9 348326 000580

CP50ZP

BUY - 1 | 50+ | 100+ | 1000+

WIDTH - 50mm

MATERIAL - 5mm

PIN Ø - 16mm

BOX QTY - 50



9 348326 000535

LP40ZP

BUY - x1 | 50+ | 100+ | 1000+

WIDTH - 40mm

MATERIAL - 6mm

PIN Ø - 16mm

BOX QTY - 50



9 348326 000597

LP50ZP

BUY - x1 | 50+ | 100+ | 1000+

WIDTH - 50mm

MATERIAL - 5mm

PIN Ø - 16mm


BOX QTY - 50



C SHAPED CLIP



L SHAPED CLIP

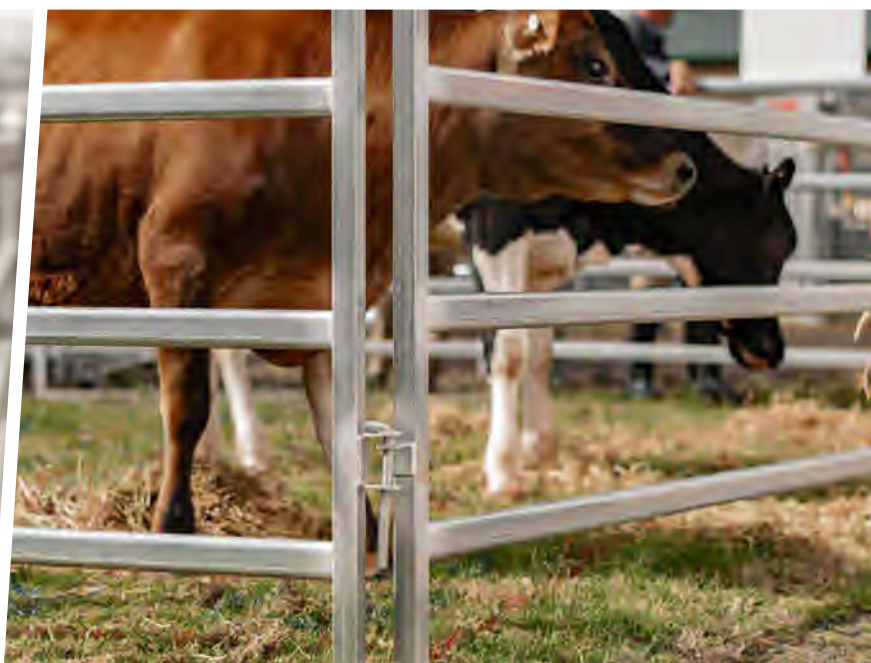

■ STEEL POST | ZINC PLATED



PANEL FOOT PLATE



FP50ZP

BUY - 1 | 50+ | 100+ | 1000+

WIDTH - 50mm | HEIGHT - 110mm |

MATERIAL - 5mm | PIN Ø - 16mm

BOX QTY - 50

■ STEEL POST | GALVANISED



Use with Panel Clip
See pg. 116

DROP PIN



DP16200G

BUY - 1 | 50+ | 100+ | 1000+

PIN Ø - 16mm | LENGTH - 200mm

BOX QTY - 50

■ STEEL POST | ZINC PLATED



**SECURE
ENCLOSED PIN
NEVER LOSE IT!**

PANEL CLIP AND YARD PIN



PCYC40

BUY - x1 | 25+ | 50+ | 500+

WIDTH - 40mm

HEIGHT - 100mm

PIN Ø - 12mm

LENGTH - 175mm

BOX QTY - 50



6MM THICK STEEL.

More heavy duty.
Industry standard is 5mm.

**BIGGER
BOTTOM HOLE.**

More movement and
adjustment for slopes.

PADLOCKABLE! FAST, EASY & SECURE!

■ STEEL POST | ZINC PLATED

WELD-ON CHAIN CATCHES



CCLD6ZP

BUY - 1 | 25+ | 50+ | 250+

CHAIN SIZE - 6mm

HEIGHT - 50mm

WIDTH - 65mm

THICKNESS - 5mm

BOX QTY - 25



CCHD8ZP

BUY - 1 | 25+ | 50+ | 250+

CHAIN SIZE - 8mm

HEIGHT - 75mm

WIDTH - 100mm

THICKNESS - 8mm

BOX QTY - 25



Registered Design



USER
FRIENDLY



SECURE

STANDARD CATCHES NEED THE CHAIN TWISTED IN PLACE **THIS IS FIDDLY!**

1

Chain **DROPS INSTANTLY** and locks without any twisting and fiddling .

2

Chain is **SECURE** and **STOCK PROOF** once it's dropped into position.



STOCKYARD FITTINGS

■ STEEL POST | ZINC PLATED

SHEEP YARD PANEL CLIP



SYP30RZP

BUY - 1 | 50+ | 100+ | 1000+

WIDTH - 30mm

HEIGHT - 12mm

MATERIAL - 6mm

PIN Ø - 12mm

BOX QTY - 100



Use with M12 Bolts

■ STEEL POST | ACETAL

SLIDING GATE CASTOR WHEEL



SGC75

BUY - 1 | 50+ | 100+ | 500+

WHEEL Ø - 75mm

AXLE Ø - 12.5mm

MATERIAL - Acetal

BOX QTY - 50



AUSTRALIAN
MADE



UV
STABILISED

**LASTING
PROTECTION
FROM THE SUN!**

MADE FROM ACETAL

**STRONGEST AND STIFFEST
THERMOPLASTIC AVAILABLE.**

**HIGHLY IMPACT RESISTANT
- CAN HANDLE TRANSPORTATION
AND HEAVY USAGE.**

“We haven't had one fail!
We shopped around for the most
durable wheel and your is it.”

JOSEPH CUNNINGHAM |





ROTECH
RURAL



122 SQUARE POST CAPS

123 CATTLE RAIL POST

124 ROUND POST CAPS

POST CAPS

POST CAPS

■ STEEL POST | GALVANISED



SQUARE POST CAPS



PC025
BUY - 1 | 200+ | 1000+
SIZE - 25mm
BOX QTY - 200



PC040
BUY - 1 | 200+ | 1000+
SIZE - 40mm
BOX QTY - 200



PC075
BUY - 1 | 50+ | 250+
SIZE - 75mm
BOX QTY - 50



PC125
BUY - 1 | 30+ | 150+
SIZE - 125mm
BOX QTY - 30



PC030
BUY - 1 | 200+ | 1000+
SIZE - 30mm
BOX QTY - 200



PC050
BUY - 1 | 200+ | 1000+
SIZE - 50mm
BOX QTY - 200



PC090
BUY - 1 | 40+ | 200+
SIZE - 90mm
BOX QTY - 40



PC150
BUY - 1 | 20+ | 100+
SIZE - 150mm
BOX QTY - 20



PC035
BUY - 1 | 200+ | 1000+
SIZE - 35mm
BOX QTY - 200



PC065
BUY - 1 | 50+ | 250+
SIZE - 65mm
BOX QTY - 50



PC100
BUY - 1 | 40+ | 200+
SIZE - 100mm
BOX QTY - 40

POST CAPS

■ STEEL POST | GALVANISED

CATTLE RAIL POST CAP



9 348326 004984

CRC11542

BUY - x1 | 40+ | 200+

SIZE - 115 X 42mm

BOX QTY - 40



**INNER RIDGES
= LESS MOVEMENT**



**DIRT PROOF DESIGN
HAMMER ON EASILY**



**MORE
CORROSION PROOF**

Increased the protection
z275 and protective oil film.

MORE STRENGTH

Increased thickness **1.4mm thick.**



**NEW AND IMPROVED!
REFINED OVER 10 YEARS**

POST CAPS

■ STEEL POST | GALVANISED



FLARE FOR EASY RAMMING

Slight flare to make it easier when positioning and ramming



ROUND POST CAPS



RPC020

BUY - 1 | 200+ | 1000+
SIZE - 50mm
POST Ø - 20NB
BOX QTY - 200



RPC040

BUY - 1 | 200+ | 1000+
SIZE - 50mm
POST Ø - 20NB
BOX QTY - 200



RPC080

BUY - 1 | 20+ | 250+ | 1250+
SIZE - 50mm
POST Ø - 80NB
BOX QTY - 50



RPC125

BUY - 1 | 30+ | 150+
SIZE - 50mm
POST Ø - 125NB
BOX QTY - 30



RPC025

BUY - 1 | 200+ | 1000+
SIZE - 50mm
POST Ø - 25NB
BOX QTY - 200



RPC050

BUY - 1 | 200+ | 1000+
SIZE - 50mm
POST Ø - 20NB
BOX QTY - 200



RPC090

BUY - 1 | 40+ | 200+
SIZE - 50mm
POST Ø - 90NB
BOX QTY - 40



RPC150

BUY - 1 | 20+ | 100+
SIZE - 50mm
POST Ø - 150NB
BOX QTY - 20



RPC032

BUY - 1 | 200+ | 1000+
SIZE - 50mm
POST Ø - 32NB
BOX QTY - 200



RPC065

BUY - 1 | 50+ | 250+
SIZE - 50mm
POST Ø - 20NB
BOX QTY - 50



RPC100

BUY - 1 | 40+ | 200+ | 1000+
SIZE - 50mm
POST Ø - 100NB
BOX QTY - 40

NEW AND IMPROVED!

REFINED OVER 10 YEARS

MORE CORROSION PROOF

Increased the protection **275gsm** and **protective oil film**.

MORE STRENGTH

Heavy-duty steel **2mm thick**.



PROVEN TO HOLD

2mm THICK STEEL
G90 GAL



**PREMIUM POINT
OF SALE**

**LASER
ETCHED
BARCODES**



“The barcodes are saving us a lot of money. The point of sale you offer, no one is doing what you are in the industry.”

ZAC HARLEY |
POWER TOOLS PLUS






- 
- 128 GALVANISED CHAIN**
 - 129 ZINC CHAIN
D SHACKLES**
 - 130 LOAD RATED D SHACKLES
QUICK LINK JOINERS**
 - 131 SWIVEL EYE SPRING HOOK
SNAP HOOK**

CHAIN & ACCESSORIES

GALVANISED

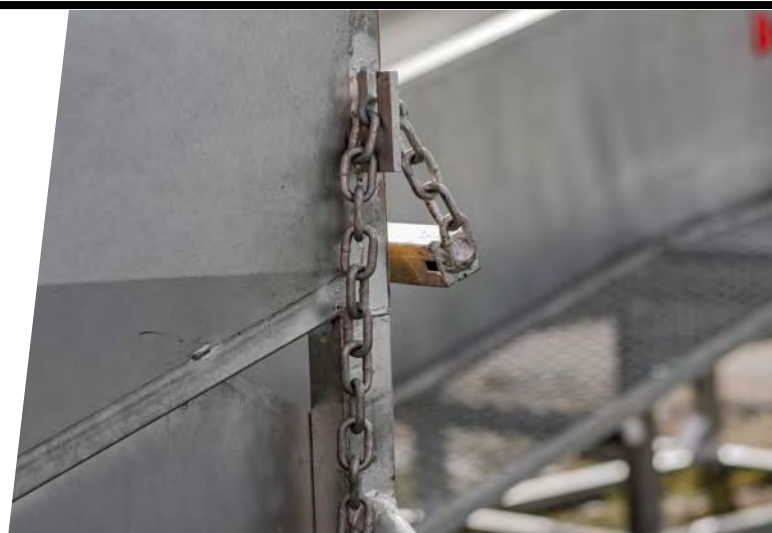

GALVANISED CHAIN



GC0325

BUY - 1 | 2+ | 5+

CHAINØ - 3mm

LINK (W x H) - 12 x 22mm

METERS - 125m



GC0625

BUY - 1 | 2+ | 5+

CHAINØ - 6mm

LINK (W x H) - 21 x 34mm

METERS - 30m



GC01325

BUY - 1 | 2+ | 5+

CHAINØ - 13mm

LINK (W x H) - 46 x 65mm

METERS - 7m

KG/DRUM - 25kg



GC0425

BUY - 1 | 2+ | 5+

CHAINØ - 4mm

LINK (W x H) - 14 x 26mm

METERS - 76m



GC0825

BUY - 1 | 2+ | 5+

CHAINØ - 8mm

LINK (W x H) - 27 x 42mm

METERS - 19m



GC0525

BUY - 1 | 2+ | 5+

CHAINØ - 5mm

LINK (W x H) - 17 x 29mm

METERS - 49m



GC01025

BUY - 1 | 2+ | 5+

CHAINØ - 10mm

LINK (W x H) - 32 x 50mm

METERS - 12m

ZINC PLATED



Easy welding.



ZNIC CHAIN



ZC0625

BUY - 1 | 2+ | 5+
CHAINØ - 6mm
LINK (W x H) - 21 x 34 mm
METERS - 30m



ZC0825

BUY - 1 | 2+ | 5+
CHAINØ - 8mm
LINK (W x H) - 27 x 42 mm
METERS - 19m

KG/DRUM - 25kg

GALVANISED

D SHACKLES



DS05G

BUY - 1 | 10+ | 20+ | 50+
SHACKLE Ø - 5mm
PIN Ø - 7mm
INT WIDTH - 11mm
BOX QTY - 10



DS06G

BUY - 1 | 10+ | 20+ | 50+
SHACKLE Ø - 6mm
PIN Ø - 7mm
INT WIDTH - 13mm
BOX QTY - 10



DS08G

BUY - 1 | 10+ | 20+ | 50+
SHACKLE Ø - 8mm
PIN Ø - 9mm
INT WIDTH - 18mm
BOX QTY - 10



DS10G

BUY - 1 | 10+ | 20+ | 50+
SHACKLE Ø - 10mm
PIN Ø - 11mm
INT WIDTH - 19mm
BOX QTY - 10



DS13G

BUY - 1 | 10+ | 20+ | 50+
SHACKLE Ø - 13mm
PIN Ø - 15mm
INT WIDTH - 29mm
BOX QTY - 10



CHAIN & ACCESSORIES

GALVANISED

LOAD RATED D SHACKLES



9 348326 001075

DS06R

BUY - 1 | 10+ | 20+ | 50+

SHACKLE Ø - 6mm

PIN Ø - 8mm

INT WIDTH - 12mm

LOAD LIMIT - 500kg

BOX QTY - 10



9 348326 001105

DS13R

BUY - 1 | 10+ | 20+ | 50+

SHACKLE Ø - 13mm

PIN Ø - 16mm

INT WIDTH - 21mm

LOAD LIMIT - 2t

BOX QTY - 10



9 348326 001082

DS08R

BUY - 1 | 10+ | 20+ | 50+

SHACKLE Ø - 8mm

PIN Ø - 10mm

INT WIDTH - 13mm

LOAD LIMIT - 750kg

BOX QTY - 10



9 348326 001112

DS16R

BUY - 1 | 10+ | 20+ | 50+

SHACKLE Ø - 16mm

PIN Ø - 19mm

INT WIDTH - 27mm

LOAD LIMIT - 3.2t

BOX QTY - 10



9 348326 001099

DS10R

BUY - 1 | 10+ | 20+ | 50+

SHACKLE Ø - 10mm

PIN Ø - 11mm

INT WIDTH - 17mm

LOAD LIMIT - 1t

BOX QTY - 10



9 348326 001129

DS19R

BUY - 1 | 10+ | 20+ | 50+

SHACKLE Ø - 19mm

PIN Ø - 22mm

INT WIDTH - 32mm

LOAD LIMIT - 4.7t

BOX QTY - 10



GALVANISED

QUICK LINK JOINERS



9 348326 000870

QL03

BUY - 1 | 10+ | 20+ | 50+

LINK Ø - 3.5mm

SIZE - 18 x 37mm

OPENING - 5mm

BOX QTY - 10



9 348326 000887

QL06

BUY - 1 | 10+ | 20+ | 50+

LINK Ø - 6mm

SIZE - 27 x 58mm

OPENING - 8mm

BOX QTY - 10



9 348326 000894

QL08

BUY - 1 | 10+ | 20+ | 50+

LINK Ø - 8mm

SIZE - 34 x 72mm

OPENING - 9mm

BOX QTY - 10



STAINLESS STEEL

SWIVEL EYE SPRING HOOKS



9 348326 000986

SESH12SS

BUY - 1 | 10+ | 20+ | 50+

INT. EYE WIDTH - 12mm

HEIGHT - 88mm

HOOK OPENING - 12mm

BOX QTY - 10



9 348326 001006

SESH19SS

BUY - 1 | 10+ | 20+ | 50+

INT. EYE WIDTH - 20mm

HEIGHT - 93mm

HOOK OPENING - 12mm

BOX QTY - 10



9 348326 000993

SESH25SS

BUY - 1 | 10+ | 20+ | 50+

INT. EYE WIDTH - 25mm

HEIGHT - 98mm

HOOK OPENING - 12mm

BOX QTY - 10



NICKEL PLATED

SWIVEL EYE SPRING HOOKS



9 348326 000955

SESH12NP

BUY - 1 | 10+ | 20+ | 50+

INT. EYE WIDTH - 12mm

HEIGHT - 76mm

HOOK OPENING - 7mm

FINISH - Nickel Plated

BOX QTY - 10



9 348326 000962

SESH20NP

BUY - 1 | 10+ | 20+ | 50+

INT. EYE WIDTH - 20mm

HEIGHT - 83mm

HOOK OPENING - 7mm

FINISH - Nickel Plated

BOX QTY - 10



9 348326 000979

SESH25NP

BUY - 1 | 10+ | 20+ | 50+

INT. EYE WIDTH - 25mm

HEIGHT - 89mm

HOOK OPENING - 7mm

FINISH - Nickel Plated

BOX QTY - 10



ZNIC

SNAP HOOKS



9 348326 000900

SH04

BUY - 1 | 10+ | 20+ | 50+

HOOK Ø - 4mm

HEIGHT - 40mm

OPENING - 5mm

BOX QTY - 10



9 348326 000917

SH05

BUY - 1 | 10+ | 20+ | 50+

HOOK Ø - 5mm

HEIGHT - 50mm

OPENING - 7mm

BOX QTY - 10



9 348326 000924

SH06

BUY - 1 | 10+ | 20+ | 50+

HOOK Ø - 6mm

HEIGHT - 60mm

OPENING - 9mm

BOX QTY - 10



9 348326 000931

SH08

BUY - 1 | 10+ | 20+ | 50+

HOOK Ø - 8mm

HEIGHT - 80mm

OPENING - 10mm

BOX QTY - 10



9 348326 000948

SH10

BUY - 1 | 10+ | 20+ | 50+

HOOK Ø - 10mm


HEIGHT - 100mm

OPENING - 14mm

BOX QTY - 10





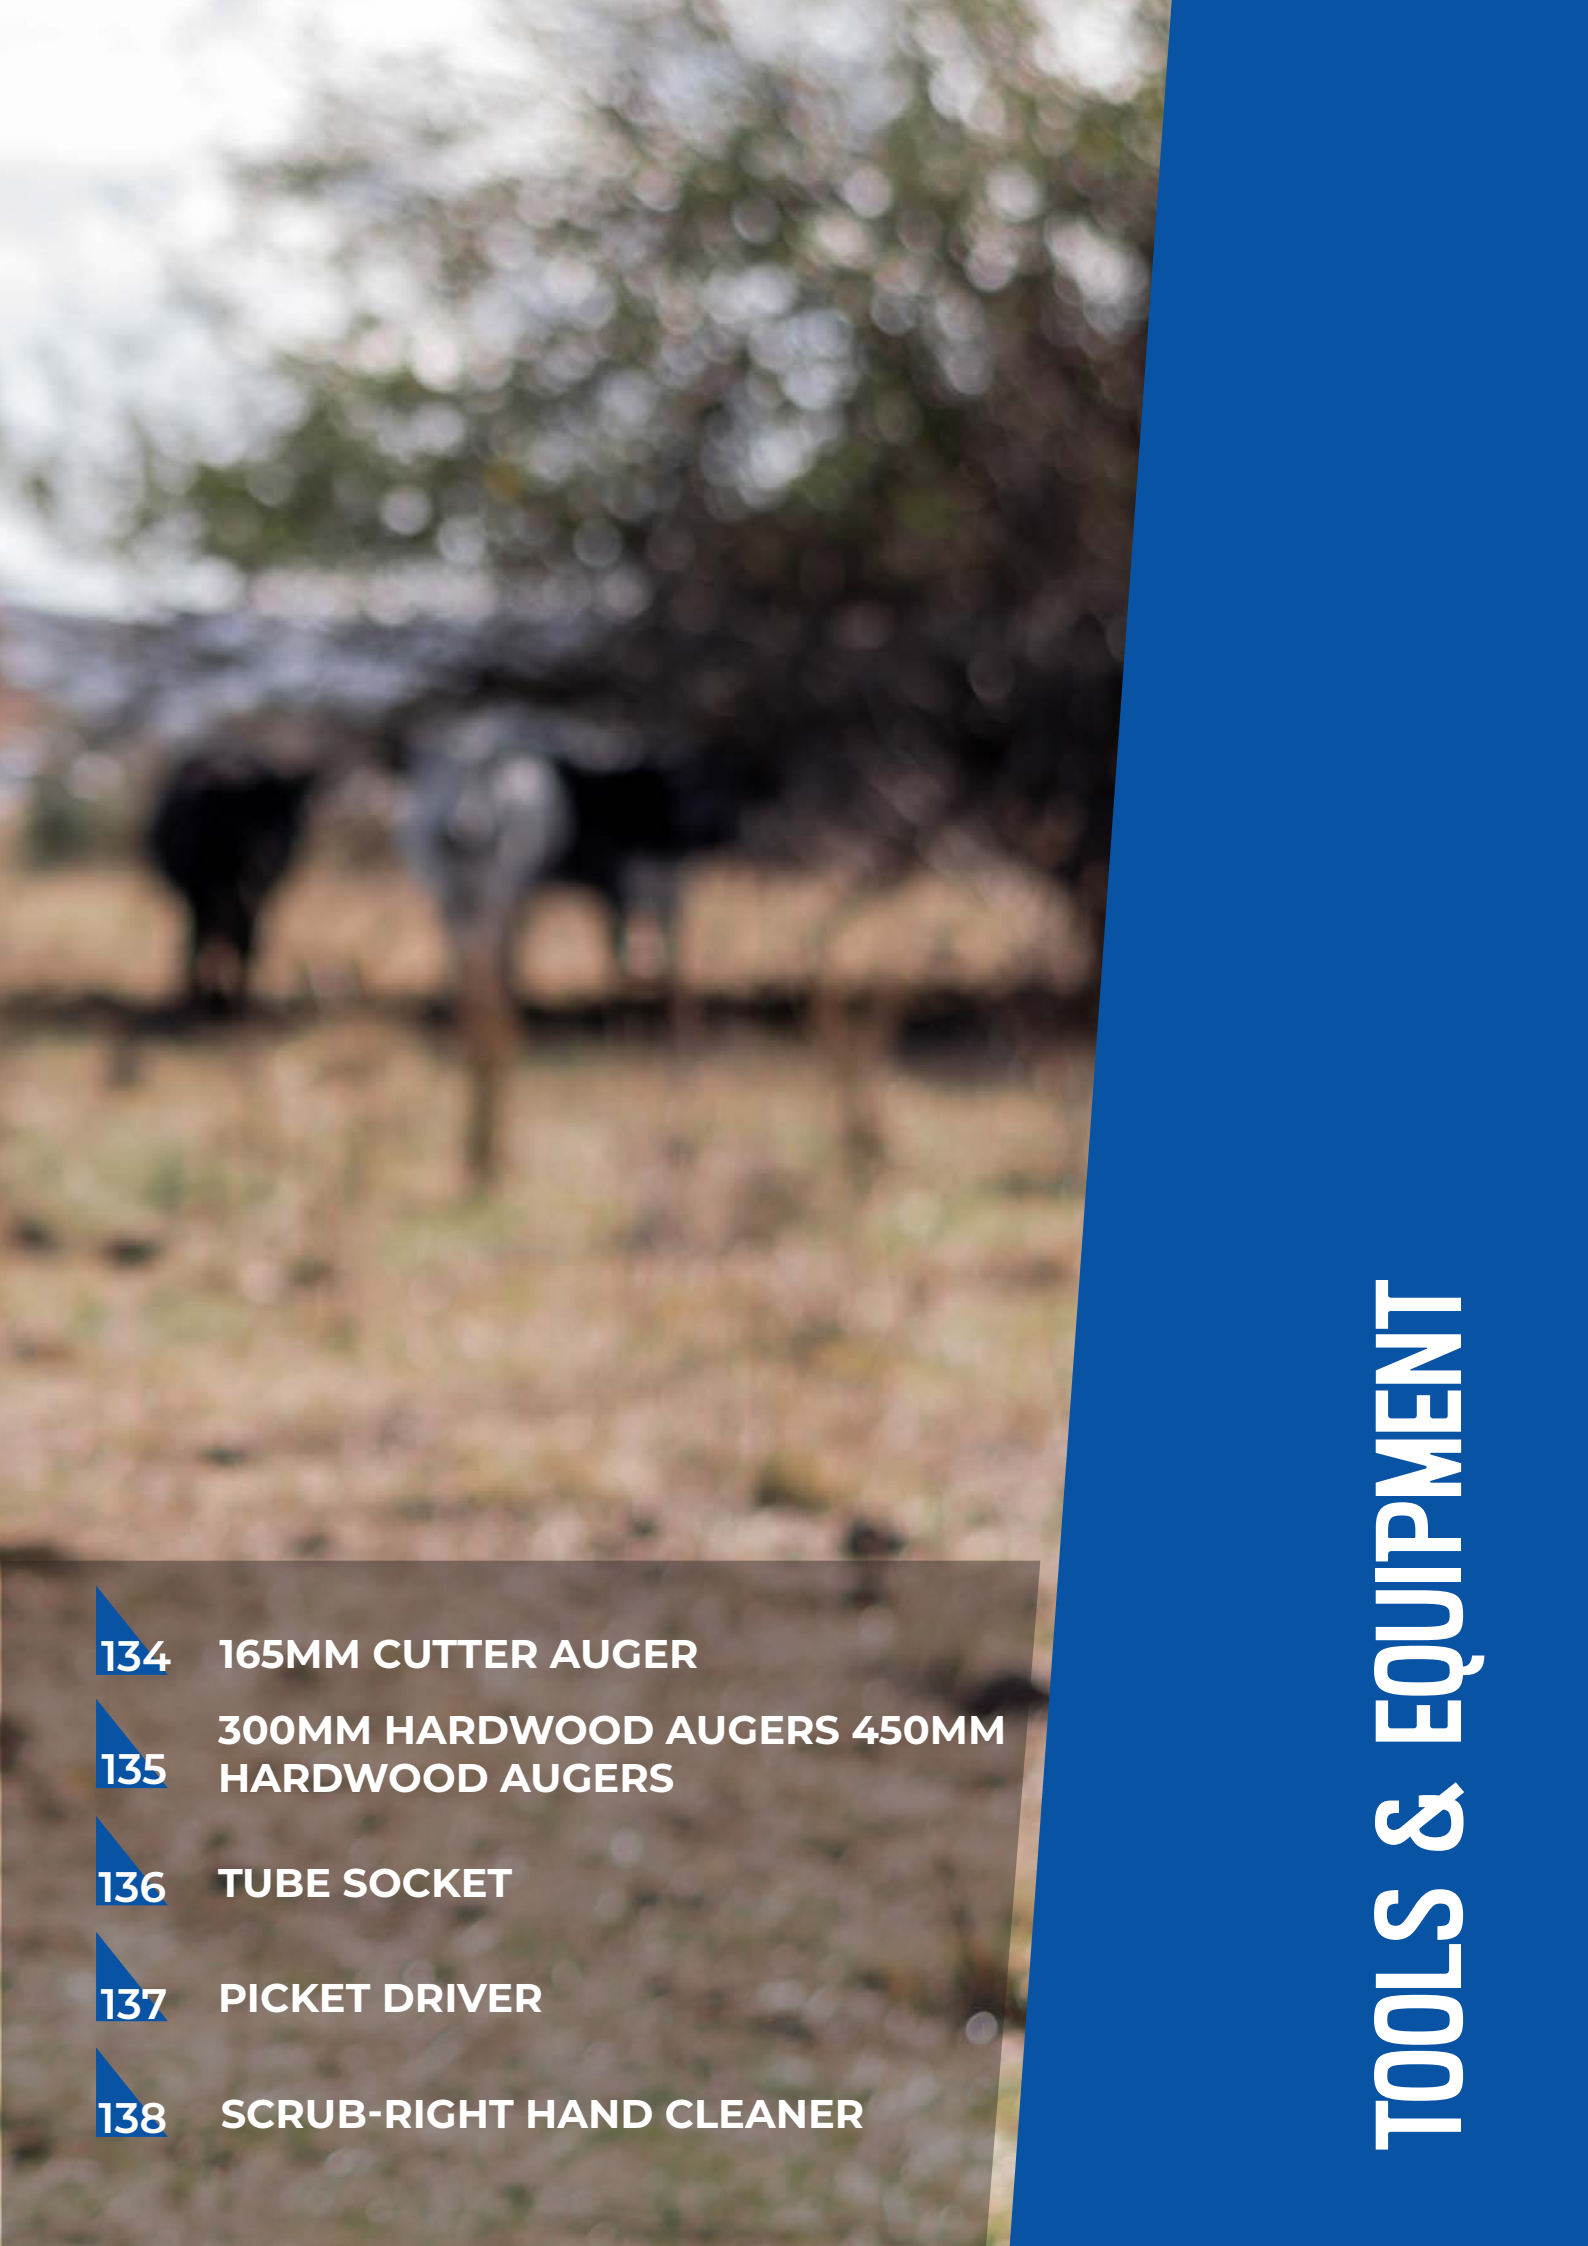

134

165MM CUTTER AUGER

135

**300MM HARDWOOD AUGERS 450MM
HARDWOOD AUGERS**

136

TUBE SOCKET

137

PICKET DRIVER

138

SCRUB-RIGHT HAND CLEANER

TOOLS & EQUIPMENT

AMAZING FEED RATE!


DRILLS 400MM IN A SINGLE PASS WITHOUT CLOGGING



UNIQUE CUTTING TIP WITH RADIUS TO CHIP RATHER THAN CUT THE WOOD.

High Strength Chromium Alloy

Keeps cooler than high carbon steel, promoting a longer life and better performance.

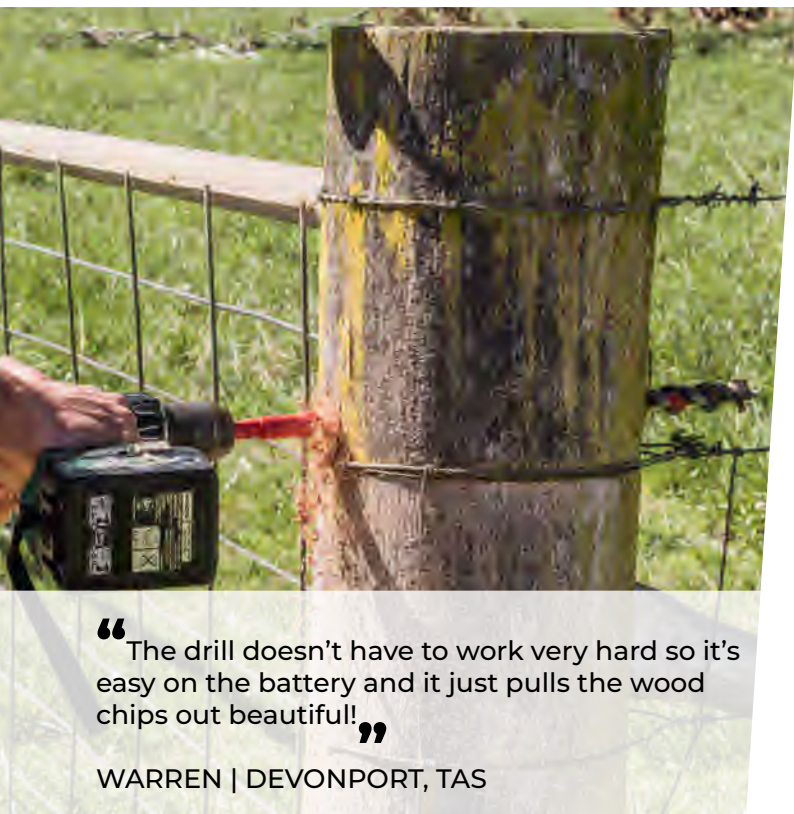

“The drill doesn't have to work very hard so it's easy on the battery and it just pulls the wood chips out beautiful!”

WARREN | DEVONPORT, TAS



SCAN TO WATCH

10-14MM

10-14mm

Holes to run wire through.

18-22MM

18-22mm

Great fit for our gate kits.

25-32MM

25-32mm

Holes to run barb wire through your posts.

165MM CUTTER AUGER



HA10165

BUY - 1 | 3+

SIZE Ø - 10mm

BOX QTY - 5



COMPACT 300MM LENGTH



300MM HARDWOOD AUGERS



HA25300

BUY - 1 | 3+

SIZE Ø - 25mm

BOX QTY - 5



HA29300

BUY - 1 | 3+

SIZE Ø - 29mm

BOX QTY - 5



HA32300

BUY - 1 | 3+

SIZE Ø - 32mm

BOX QTY - 5

STANDARD 450MM LENGTH



450MM HARDWOOD AUGERS



HA10450

BUY - 1 | 3+

SIZE Ø - 10mm

BOX QTY - 5



HA11450

BUY - 1 | 3+

SIZE Ø - 11mm

BOX QTY - 5



HA12450

BUY - 1 | 3+

SIZE Ø - 12mm

BOX QTY - 5



HA13450

BUY - 1 | 3+

SIZE Ø - 13mm

BOX QTY - 5



HA14450

BUY - 1 | 3+

SIZE Ø - 14mm

BOX QTY - 5



HA16450

BUY - 1 | 3+

SIZE Ø - 16mm

BOX QTY - 5



HA18450

BUY - 1 | 3+

SIZE Ø - 18mm

BOX QTY - 5



HA19450

BUY - 1 | 3+

SIZE Ø - 19mm

BOX QTY - 5



HA22450

BUY - 1 | 3+

SIZE Ø - 22mm

BOX QTY - 5



HA25450

BUY - 1 | 3+

SIZE Ø - 25mm

BOX QTY - 5



HA29450

BUY - 1 | 3+

SIZE Ø - 29mm

BOX QTY - 5



HA32450

BUY - 1 | 3+

SIZE Ø - 32mm

BOX QTY - 5



19MM M12 HIGH TENSILE NUT

USED ACROSS **END ASSEMBLIES**, **HINGES**, **LATCHES**



STANDARD TUBE SOCKET



STS

BUY BREAKS - 1 | 5+ | 10+

LENGTH - 410mm

MATERIAL - Standard Steel

**Designed to fit the tension
cable eyebolt**

Standard 1/2" impact driver

Genuine impact socket



HEAVY-DUTY TUBE SOCKET



STSHD

BUY BREAKS - 1 | 5+ | 10+


LENGTH - 480mm

MATERIAL - Chrome

Molybdenum Alloy Steel

HEAVY-DUTY SOCKET **A MUST HAVE FOR CONTRACTORS**

Chrome Molybdenum Impact Steel, Length - 480mm

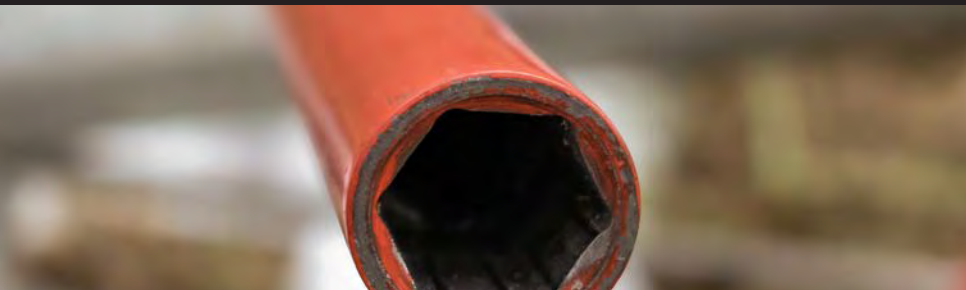

“Never wear out. A must have for any contractors using the Rotech kits. They take a beating.”

MATT L | CONTRACTOR HUNTER VALLEY, NSW



DRIVE STRAIGHTER. MORE CONTROL.



SCAN
TO
WATCH



PICKET POST DRIVER



PPD

BUY BREAKS - 1 | 2+ | 5+

WEIGHT - 10.5kg

DIAMETER - 50 NB

LENGTH - 824mm

BUILT-IN LOCATOR PIN


LOCKS THE PICKET IN POSITION

ALLOWS FOR YOU TO CORRECT
ALIGNMENT MID-DRIVE



ANTI-SHOCK HANDLE DESIGN

- Handles mount through an **anti-shock collar**, vibration is absorbed.
- **No sharp gusset edges**, more comfortable hold.

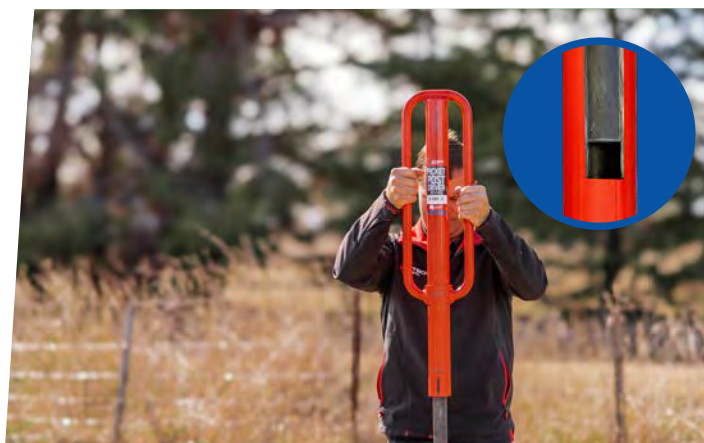

GREATER FORCE, TIGHTER FITTING

- **Additional 90mm drive weight**, increased impact, faster drive.
- **60mm diameter**, fits snug more controlled and aligned.



PICKET DRIVER

GRIT HAND CLEANER

TOUGH ON DIRT - SOFT ON HANDS

SCRUB-RIGHT HAND CLEANER - 500ML



SRHC500ML

BUY - 1 | 20+ | 40+ | 80+
BOX QTY - 20



SCRUB-RIGHT HAND CLEANER - 5L



SRHC5L

BUY - 1 | 4+ | 8+ | 16+
BOX QTY - 4



SCRUB-RIGHT HAND CLEANER - 20L



SRHC20L

BUY - 1 | 8+ | 16+ | 32+
BOX QTY - 8



SCRUB-RIGHT PUMP - SUITABLE FOR 20L BOTTLE



SRLP

BUY - 1 | 8+
BOX QTY - 8



CUTS THROUGH GREASE AND OIL



SUITABLE FOR HOME AND WORKPLACE USE

Non toxic - septic safe.

Refreshing peppermint scent, enriched with macadamia and vitamin E oils.



STAY UP TO DATE


**RANGE EXPANDING
SOON!**



**CHECK OUT
OUR WEBSITE**



**FOLLOW US
ON FACEBOOK**

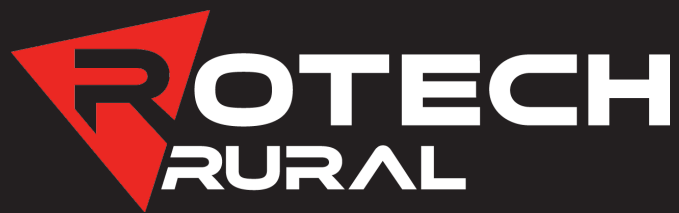

FARM FENCES.**SORTED.**

T - 1800 004 940 E - sales@rotechrural.com.au

HO - 8 Ribbon Gum Ave, Armidale, NSW 2350

W1 - 260 Ring Rd, Wendouree, VIC 3355

W2 - 20 Axis Ct, Brisbane QLD 4505



**FAMILY OWNED
SINCE 1998**

www.rotechrural.com.au